

KLR650

Motorcycle

OWNER'S MANUAL

A Read this manual carefully. It contains safety information.

A WARNING

Operating, servicing and maintaining a passenger vehicle or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65warnings.ca.gov/passenger-vehicle.

Quick Reference Guide

This Quick Reference Guide will assist you in finding the information you're looking for.

SAFETY INFORMATION

GENERAL INFORMATION

HOW TO RIDE THE MOTORCYCLE

MAINTENANCE AND ADJUSTMENT

APPENDIX

MAINTENANCE RECORD

A Table of Contents is included after the Foreword.

Whenever you see the symbols shown below, heed their instructions! Always follow safe operating and maintenance practices.

A DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

A WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

NOTICE is used to address practices not related to personal injury.

NOTE

ONOTE indicates information that may help or guide you in the operation or service of the vehicle.

NOTICE

THIS PRODUCT HAS BEEN MANUFACTURED FOR USE IN A REASONABLE AND PRUDENT MANNER BY A QUALIFIED OPERATOR AND AS A VEHICLE ONLY.

Foreword

Congratulations on your purchase of a new Kawasaki motorcycle. Your new motorcycle is the product of Kawasaki's advanced engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Please read this Owner's Manual carefully before riding so that you will be thoroughly familiar with the proper operation of your motorcycle's controls, its features, capabilities, and limitations. This manual offers many safe riding tips, but its purpose is not to provide instruction in all the techniques and skills required to ride a motorcycle safely. Kawasaki strongly recommends that all operators of this vehicle enroll in a motorcycle rider training program to attain awareness of the mental and physical requirements necessary for safe motorcycle operation.

To ensure a long, trouble-free life for your motorcycle, give it the proper care and maintenance described in this manual. For those who would like more detailed information on their Kawasaki Motorcycle, a Service Manual is available for purchase from any authorized Kawasaki motorcycle dealer. The Service Manual contains detailed disassembly and maintenance information. Those who plan to do their own work should, of course, be competent mechanics and possess the special tools described in the Service Manual.

Keep this Owner's Manual aboard your motorcycle at all times so that you can refer to it whenever you need information.

This manual should be considered a permanent part of the motorcycle and should remain with the motorcycle when it is sold.

All rights reserved. No part of this publication may be reproduced without our prior written permission.

This publication includes the latest information available at the time of printing. However, there may be minor differences between the actual product and illustrations and text in this manual.

All products are subject to change without prior notice or obligation.

KAWASAKI HEAVY INDUSTRIES, LTD. Motorcycle & Engine Company

© 2021 Kawasaki Heavy Industries, Ltd.

Mar. 1, 2021 (1)

Emission Control Information

To protect the environment in which we all live, Kawasaki has incorporated crankcase emission (1) and exhaust emission (2) control systems in compliance with applicable regulations of the United States Environmental Protection Agency and California Air Resources Board. Additionally, Kawasaki has incorporated an evaporative emission control system (3) in compliance with applicable regulations of the United States Environmental Protection Agency and California Air Resources Board.

1. Crankcase Emission Control System

This system eliminates the release of crankcase vapors into the atmosphere. Instead, the vapors are routed through an oil separator to the intake side of the engine. While the engine is operating, the vapors are drawn into the combustion chamber, where they are burned along with the fuel and air supplied by the fuel injection system.

2. Exhaust Emission Control System

This system reduces the amount of pollutants discharged into the atmosphere by the exhaust of this motorcycle. The fuel, ignition and exhaust systems of this motorcycle have been carefully designed and constructed to ensure an efficient engine with low exhaust pollutant levels. The exhaust system of this model motorcycle includes a catalytic converter system.

3. Evaporative Emission Control System

The evaporative emission control system for this vehicle consists of low permeation fuel hoses and fuel tank.

3. Evaporative Emission Control System (California)

Vapors caused by fuel evaporation in the fuel system are not vented into the atmosphere. Instead, fuel vapors are routed into the running engine to be burned, or stored in a canister when the engine is stopped.

High Altitude Performance Adjustment Information

High Altitude adjustment is not required.

Maintenance and Warranty

Proper maintenance is necessary to ensure that your motorcycle will continue to have low emission levels. This Owner's Manual contains those maintenance recommendations for your motorcycle. Those items identified by the Periodic Maintenance Chart are necessary to ensure compliance with the applicable standards.

As the owner of this motorcycle, you have the responsibility to make sure that the recommended maintenance is carried out according to the instructions in this Owner's Manual at your own expense.

The Kawasaki Limited Emission Control System Warranty requires that you return your motorcycle to an authorized Kawasaki dealer for remedy under warranty. Please read the warranty carefully, and keep it valid by complying with the owner's obligations it contains.

You should keep a maintenance record for your motorcycle. To assist you in keeping this record, we have provided space on pages 181 through 186 of this manual where an authorized Kawasaki dealer, or someone equally competent, can record the maintenance. You should also retain copies of maintenance work orders, bills, etc., as verification of this maintenance.

Tampering With Noise Control System Prohibited

Federal law prohibits the following acts or the causing thereof: (1) the removal or rendering inoperative by any person other than for purposes of maintenance, repair, or replacement, of any device or element of design incorporated into any new vehicle for the purpose of noise control prior to its sale or delivery to the ultimate purchaser or while it is in use, or (2) the use of the vehicle after such device or element of design has been removed or rendered inoperative by any person.

Among those acts presumed to constitute tampering are the acts listed below:

- * Replacement of the original exhaust system or muffler with a component not in compliance with Federal regulations.
- * Removal of the muffler(s) or any internal portion of the muffler(s).
- * Removal of the air box or air box cover.
- * Modifications to the muffler(s) or air intake system by cutting, drilling, or other means if such modifications result in increased noise levels.

TABLE OF CONTENTS

15	GENERAL INFORMATION	26
15	Specifications	26
15	Serial Number Locations	31
	Location of Labels	32
15	Location of Parts	42
	Meter Instruments	47
16	Indicators	48
17	Speedometer	54
18		54
18	Features	58
19	Keys	59
19	Ignition Switch/Steering Lock	59
20	Right Handlebar Switches	61
20	Left Handlebar Switches	62
21	Fuel	63
21	Fuel Requirements	63
21	Filling the Tank	66
22	Side Stand	69
	Seat	69
24	Windshield	70
	15 15 15 16 17 18 19 19 20 21 21 21 22	15 Specifications

Tool Kit	72	Engine Oil	112
Saddlebags (KL650H/L)	72	Coolant	
Rear Carrier/Tie Hooks	76	Air Cleaner	121
Top Case (KL650J)	78	Throttle Control System	126
Rear View Mirrors	82	Idle Speed	128
Fog Lights (KL650H/L)	82	Clutch	129
DC Output (KL650H/L)	83	Spark Arrester	130
USB Socket (KL650H/L)	84	Drive Chain	132
Electrical Accessory Connectors	86	Brakes	
HOW TO RIDE THE MOTORCYCLE.	89	Brake Light Switches	139
Break-In	89	Suspension System	142
Starting the Engine	91	Front Fork	142
Moving Off	93	Rear Shock Absorber	142
Shifting Gears	93	Setting Table	145
Braking	95	Wheels	147
ABS	96	Battery	150
Stopping the Engine	99	Headlight	155
Stopping the Motorcycle in an		Fuses	157
Emergency	99	General Lubrication	158
	100	Cleaning	159
MAINTENANCE AND ADJUSTMENT	102	General Precautions	159
Daily Checks	104	Where to be Careful	163
Periodic Maintenance	107	Washing Your Vehicle	164

APPENDIX 166	Location of DFI System Diagnostic
Storage 166	Connector 177
Troubleshooting Guide 169	Vehicle Data Recordings 178
Your Warranty/Owner Satisfaction 170	Event Data Recorder 179
Reporting Safety Defects 176	MAINTENANCE RECORD 181
Environmental Protection 177	

SAFETY INFORMATION

Read Owner's Manual

Read this Owner's Manual carefully before riding so that you will be thoroughly familiar with the proper operation of your motorcycle's controls, its features, capabilities, and limitations. This manual offers many safe riding tips, but its purpose is not to provide instruction in all of the techniques and skills required to ride a motorcycle safely.

Training

Kawasaki strongly recommends that all operators of this vehicle complete a suitable motorcycle rider training program to learn the proper skills and techniques necessary for safe motorcycle operation.

Daily Checks and Periodic Maintenance

It is important to keep your motorcycle properly maintained and in safe riding condition. Inspect your motorcycle before every ride and carry out all periodic maintenance. See the Daily Checks section and the Periodic Maintenance section in the MAINTENANCE AND ADJUSTMENT chapter for more information

WARNING

Failure to perform these checks or to correct a problem before operation may result in serious damage or an accident. Always perform daily checks before operation.

16 SAFETY INFORMATION

To ensure your motorcycle is serviced using the latest servicing information, it is recommended that an authorized Kawasaki Dealer performs the periodic maintenance as directed in the Owner's Manual.

If you notice any irregular operating condition, have your motorcycle thoroughly checked at an authorized Kawasaki dealer as soon as possible.

Loading and Accessories Information



⚠ WARNING

Incorrect loading, improper installation or use of accessories, or modification of your motorcycle may result in an unsafe riding condition. Before you ride the motorcycle, make sure it is not overloaded and that you have followed these instructions.

Maximum Load

Weight of rider, passenger, baggage, and accessories must not exceed 182 kg (401 lb).

With the exception of genuine Kawasaki Parts and Accessories, Kawasaki has no control over the design or application of accessories. In some cases, improper installation

or use of accessories, or motorcycle modification, will void the motorcycle warranty; can negatively affect performance, stability and safety; and can even be illegal.

In selecting and using accessories, and in loading the motorcycle, you are personally responsible for your own safety and the safety of other persons involved.

NOTE

OKawasaki Parts and Accessories have been specially designed for use on Kawasaki motorcycles. We strongly recommend that all parts and accessories you add to your motorcycle be genuine Kawasaki components.

Because a motorcycle is sensitive to changes in weight and aerodynamic forces, you must take extreme care in carrying cargo, passengers and/or in fitting additional accessories. The following general guidelines have been prepared to assist you in making your determinations.

Passenger

- Never carry more than one passenger.
- The passenger should only sit on the pillion.
- 3. Any passenger should be thoroughly familiar with motorcycle operation. The passenger can affect control of the motorcycle by improper positioning during cornering and sudden movements. It is important that the passenger sits still while the motorcycle is in motion and not interfere with the operation of the motorcycle. Do not carry animals on your motorcycle.

18 SAFETY INFORMATION

4. Do not carry passengers unless passenger footpegs are installed. Instruct any passenger before riding to keep his or her feet on the passenger footpegs and hold on to the operator or grab rail. Do not carry a passenger unless he or she is tall enough to reach the footpegs with their feet.

Baggage and Luggage

- All baggage should be carried as low as possible to reduce the effect on the motorcycle's center of gravity. Baggage weight should also be distributed equally on both sides of the motorcycle. Avoid carrying baggage that extends beyond the rear of the motorcycle.
- Baggage should be securely attached. Make sure that the baggage

- will not move around while you are riding. Recheck baggage security as often as possible (not while the motorcycle is in motion) and adjust as necessary.
- Do not carry heavy or bulky items on a luggage rack. It is designed for light items, and overloading can affect handling due to changes in weight distribution and aerodynamic forces.

Accessories

 Do not install accessories or carry baggage that impairs the performance of the motorcycle. Make sure that you have not adversely affected any lighting components, road clearance, banking capability (i.e., lean angle), control operation, wheel travel, front fork movement,

- or any other aspects of the motorcycle's operation.
- 2. Weight attached to the handlebars or front fork will increase the mass of the steering assembly and can result in an unsafe riding condition.
- 3. Fairings, windshields, backrests, and other large items have the capability of adversely affecting stability and handling of the motorcycle, not only due to their weight, but also due to the aerodynamic force acting on these surfaces while the motorcycle is in operation. Poorly designed or installed items can result in an unsafe riding condition.

Other Load

1. This motorcycle is not intended to be equipped with a sidecar or to be

- used to tow any trailers or other vehicles. Kawasaki does not manufacture sidecars or trailers for motorcycles and cannot predict the effects of such accessories on handling or stability, but can only warn that the effects can be adverse and that Kawasaki cannot assume responsibility for the results of such unintended use of the motorcycle.
- 2. Furthermore, any adverse effects on motorcycle components caused by the use of such accessories will not be remedied under warranty.

If You are Involved in an Accident

Make sure of your own safety first. Determine the severity of any injuries and call for emergency assistance if needed. Always follow applicable laws

20 SAFETY INFORMATION

and regulations if any other person, vehicle or property is involved.

Do not attempt to continue riding without first evaluating your motorcycle's condition. Inspect for fluid leaks, check critical nuts and bolts, and check the handlebars, control levers, brakes, and wheels for damage and proper function. Ride slowly and cautiously - your motorcycle may have suffered damage that is not immediately apparent. Have your motorcycle thoroughly checked at a Kawasaki dealer as soon as possible.

Safe Operation

The following should be carefully observed for safe and effective vehicle operation.

Carbon Monoxide Hazard

A DANGER

Exhaust gas contains carbon monoxide, a colorless, odor-less poisonous gas. Inhaling carbon monoxide can cause serious brain injury or death. DO NOT run the engine in enclosed areas. Operate only in a well-ventilated area.

Fueling

⚠ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. To avoid a possible fire or explosion, turn the ignition switch off. Do not smoke. Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

Never Ride with Drugs or Alcohol

Alcohol and drugs impair your judgment and reaction time. Never consume alcohol or drugs before or while riding motorcycles.

Protective Gear and Clothing

Helmet

Kawasaki strongly recommends both the operator and passenger wear a DOT-approved helmet even if this is not a legal requirement.

- Make sure that your helmet fits correctly and is properly fastened.
- Choose a motorcycle helmet that meets DOT safety standards. Ask your motorcycle dealer to advise you if necessary.

22 SAFETY INFORMATION

Eye Protection

Always use eye protection. If your helmet does not have a visor installed, wear goggles.

Gloves

Wear gloves which have suitable protection for your hands, especially against abrasion.

Clothing

Wear the riding wear which have protectors for each parts of the body (chest, shoulders, back, elbows and knees, etc.) as much as possible, or wear protectors for them.

- Always wear a long-sleeved jacket and long trousers which are abrasion resistant and keep you warm.
- Wear clothing that allows freedom of movement.
- Avoid wearing clothes which have loose cuffs or other fastenings which

- could interfere with the controls of your motorcycle.
- Wear bright, highly visible clothing.

Boots

Wear proper protective boots that fit properly and do not interfere with gear shifting or braking.

Safe Riding Techniques

Keep Hands on Handlebars

When riding always keep both hands on the handlebars and both feet on the footpegs. Removing your hands from the handlebars or feet from the footpegs while riding can be hazardous. If you remove even one hand or foot, you reduce your ability to control the motorcycle.

Look Over Your Shoulder

Before changing lanes, look over your shoulder to make sure the way is clear. Do not rely solely on the rear view mirror; you may misjudge a vehicle's distance and speed, or you may not see it at all.

Accelerate and Brake Smoothly

In general your actions should be smooth as sudden acceleration, braking or turning may cause loss of control, especially when riding in wet conditions or on loose road surfaces, when the ability to maneuver will be reduced.

Select Correct Gear Speeds

When going up steep slopes, shift to a lower gear so that there is power to spare rather than overloading the engine.

Use Both Front and Rear Brakes

When applying the brakes, use both the front and rear brakes. Applying only one brake for sudden braking may cause the motorcycle to skid and lose control.

Use Engine Brake

When going down long slopes, help control vehicle speed by closing the throttle so that the engine can act as an auxiliary brake. Use the front and rear brakes for primary braking.

Riding in Wet Conditions

Rely more on the throttle to control vehicle speed and less on the front and rear brakes. The throttle should also be used judiciously to avoid skidding the rear wheel from too rapid acceleration or deceleration.

Braking performance is also reduced in wet conditions. Carefully ride at a

24 SAFETY INFORMATION

slow speed and apply the brakes several times to help dry and restores them to normal operating performance.

Lubricate the drive chain after wet -weather riding to prevent rust and corrosion.

Ride Prudently

Riding at the proper speed and avoiding unnecessarily fast acceleration are important not only for safety and low fuel consumption but also for long vehicle life and quieter operation.

Riding on Rough Roads

Exercise caution, slow down, and grip the fuel tank with the knees for better stability.

Acceleration

When quick acceleration is necessary to pass another vehicle, shift to a lower gear to obtain the necessary power.

Downshifting

To avoid engine damage and rear wheel lock-up do not downshift at high rpm.

Avoid Unnecessary Weaving

Unnecessary weaving jeopardizes the safety of both the rider and other motorists.

Additional Considerations for Off Road Operation

Brakes

The importance of reliable brakes is obvious. Check to see that they are correctly adjusted and functioning properly.

Steering

Looseness in the steering can cause loss of control. Check to see that the handlebar turns freely but has no play.

Tires

Due to the extra stress to the tires on rough roads, be sure to examine their overall condition, and inflate to the proper pressure.

Drive Chain

When not adjusted properly, the severe stress on rough roads can cause damage to the sprockets and cause the chain to be thrown. Examine the chain slack and alignment, and lubricate if necessary.

Fuel

Have sufficient fuel for the high fuel consumption on rough roads.

Engine Oil

To avoid seizure and resulting loss of control, make certain the oil level is at the upper level line.

Coolant

To avoid overheating, check that the coolant level is at the upper level line.

Miscellaneous

Check to see that the electrical equipment is functioning properly, all nuts and bolts are tight, and all safety related parts are in good condition.

Specifications

PERFORMANCE

Minimum Turning Radius 2.4 m (7.9 ft)

DIMENSIONS

Overall Length 2 280 mm (89.76 in.)

Overall Width 970 mm (38.2 in.)

Overall Height/High Position:

KL650F/G/J 1 430 mm (56.30 in.)/1 465 mm (57.68 in.)

KL650H/L 1 420 mm (55.91 in.)/1 455 mm (57.28 in.)

Wheelbase 1 540 mm (60.63 in.)

Road Clearance 210 mm (8.27 in.)

Curb Mass:

KL650F 209 kg (461 lb) KL650G 207 kg (456 lb) KL650H 221 kg (487 lb) KL650J 214 kg (472 lb) KL650L 219 kg (483 lb)

ENGINE

Type DOHC, single-cylinder, 4-stroke, liquid-cooled

Displacement 652 cm³ (39.8 cu in.)

Bore × Stroke 100.0 × 83.0 mm (3.94 × 3.27 in.)

Compression Ratio 9.8:1

Starting System Electric starter

Fuel System FI (Fuel Injection)

Ignition System Battery and coil (transistorized ignition)

Ignition Timing 5° BTDC @1 500 r/min (rpm) ~ 49° BTDC @4 500

(Electronically advanced) r/min (rpm)

Spark Plug: Type NGK DPR8EA-9

Gap $0.8 \sim 0.9 \text{ mm} (0.031 \sim 0.035 \text{ in.})$

Lubrication System Forced lubrication (wet sump)

Engine Oil: Type API SG, SH, SJ, SL or SM with JASO MA, MA1 or MA2

Viscosity SAE 10W-40

Capacity 2.1 L (2.2 US qt)

Coolant Capacity 1.5 L (1.6 US qt)

TRANSMISSION

Transmission Type 5-speed, constant mesh, return shift

Clutch Type Wet, multi disc

Driving System Chain drive

Primary Reduction Ratio 2.273 (75/33)

Final Reduction Ratio 2.867 (43/15)

Overall Drive Ratio 5.158 (Top gear)

Gear Ratio: 1st 2.267 (34/15)

2nd 1.444 (26/18)

3rd 1.136 (25/22)

4th 0.955 (21/22)

5th 0.792 (19/24)

FRAME

Caster 30°

Trail 121 mm (4.76 in.)

Tire Size: Front 90/90-21M/C 54S

Rear 130/80-17M/C 65S

Rim Size: Front 21 × 1.60

Rear $17M/C \times MT2.50$

Fuel Tank Capacity 23 L (6.1 US gal)

Brake Fluid: Front DOT3 or 4

Rear DOT4

ELECTRICAL EQUIPMENT

Battery 12 V 8.4 Ah (20 HR)

Headlight: High Beam LED

Low Beam LED

City Light LED

Brake/Tail Light 12 V 21/5 W (P21/5W)

Turn Signal Light 12 V 10 W (RY10W)

License Plate Light 12 V 5 W (W5W)


Even if any one element of LED (Light Emitting Diode) light does not go on, consult with an authorized Kawasaki dealer.

Specifications are subject to change without notice.

Serial Number Locations


The engine and frame serial numbers are used to register the motorcycle. They are the only means of identifying your particular machine from others of the same model type. These serial numbers may be needed by your dealer when ordering parts. In the event of theft, the investigating authorities will require both numbers as well as the model type and any peculiar features of your machine that can help them identify it.

Engine No.

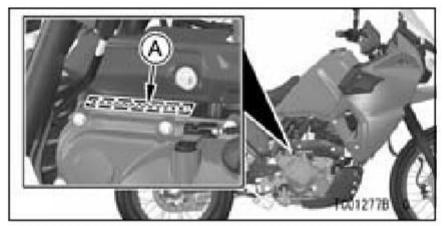

A. Engine Number

Frame No.

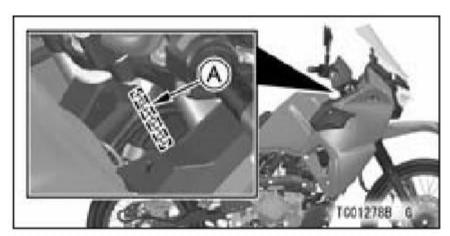

A. Frame Number


Location of Labels

All warning labels which are on your vehicle are repeated here. Read labels on your vehicle and understand them thoroughly. They contain information which is important for your safety and the safety of anyone else who may operate your vehicle. Therefore, it is very important that all warning labels be on your vehicle in the locations shown. If any label is missing, damaged, or worn, get a replacement from your Kawasaki dealer and install it in the correct position.


NOTE


OThe sample warning labels in this section have part numbers to help


- you and your dealer obtain the correct replacement.
- Refer to the actual vehicle label for model specific data grayed out in the illustration.

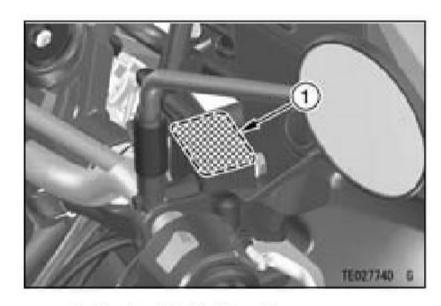


1. Brake Fluid (Front)

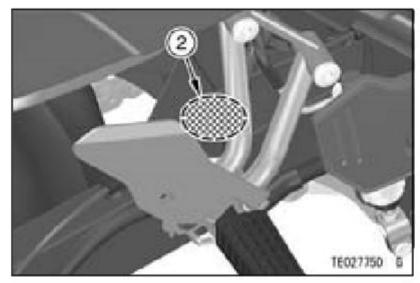


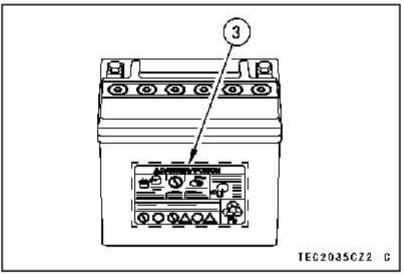


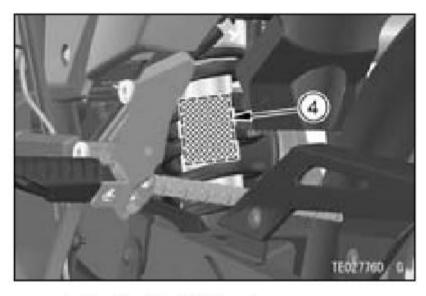

- Brake Fluid (Rear)
 Battery Poison/Danger
 Rear Shock Absorber Warning

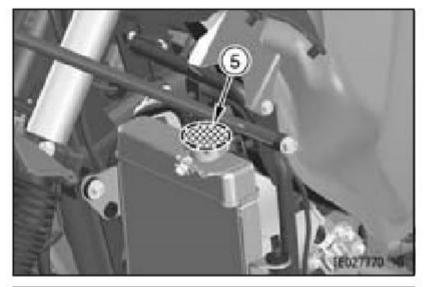


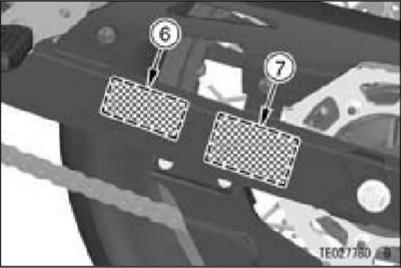


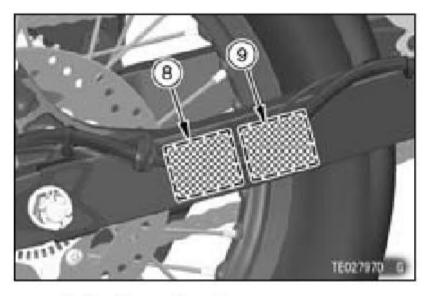

- 5. Radiator Cap Danger6. Important Drive Chain Information7. Tire and Load Data
- 8. Vehicle Emission Control Information
- *9. Vacuum Hose Routing Diagram

*: only on California model

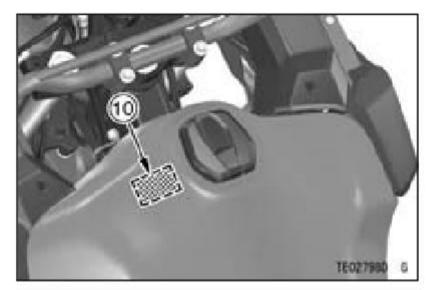


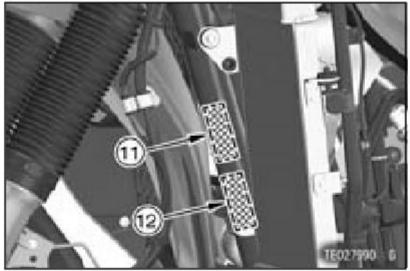




- *10. Fuel Level
- 11. Weight and Manufacture
 12. Noise Emission Control Information
 13. Rear Carrier Load Limit Warning

*: only on California model

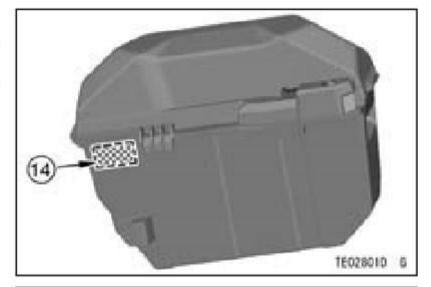



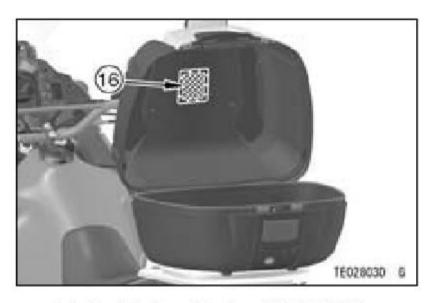

- 14. Saddlebag Notice (KL650H/L)
 15. Saddlebag Load Limit Warning (KL650H/L)
 16. Top Case Load Limit Warning (KL650J)

1)

WARNING.USE ONLY DOTS OR
DOT4 BRAKE FLUID FROM A
SEALED CONTAINER.
CLEAN FILLER CAP
BEFORE REMOVING.
LIQUIDE DE FREIN DOTS OU
DOT4 SEULEMENT.

TE03925CN9 C

2)



TE03879DN9 C

3)



TE03508D S

4)



This unit conte hair on presaure hitrogen gas.

A shendhing can define had being

▶ To not incloamnte curetura or ocan.

A AVERTISSEMENT

Cabbe un dà combient de l'azobe à haute pression une mouvaige menieulerien pour entreiner d'explesion.

• ve pas erő er hi periorar ni cavi r




元、要素力又入与(4)。


収っ扱いをいると思想する恐性があっます。

● 男中への投入、穴あじ、分配はしないでくりだけ。

5)



7)



56053-1837

TE03264FN9 S

6)


CHAIN INFORMATION

Drive chain slack should be checked before each ride and adjusted it out of normal adjustment range (30 40 am. 1.2 1.5 ln). To check stack, neasure stack nidway between the sproclets while the

motorcycle is on the aide atend or center stand. See Owner's Name of the first three chair information.

56033-1478

8)




TE03254FN9 S


TE03266F

S


8) only on California model

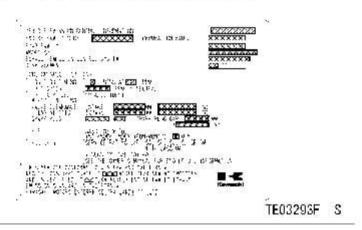

9) only on California model



10) only on California model

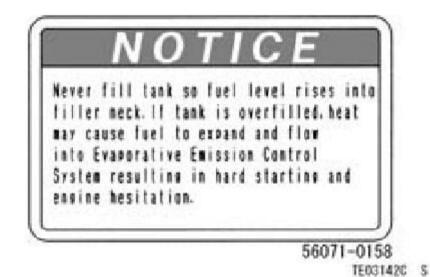


11)

	SAKI HEAVY IN	IDUSTRIES,	LTB.
DATE: 🔯	XXXXI TEIS	VEHICLE CO	MFORMS
TO ALL APPL:	CABLE FEDERA	L MOTOR VE	HICLE
	ARDS IN EFFE		
	JAE SHOWN (80)		27.82 24.182
	BS. WITH XXX XXXXXX RIM.		CP10
GAMR R SOL			××××××××××××××××××××××××××××××××××××××
	XXXXXX RIV.		CûLD.
100000	XXXXXXXXXXX	88888	
NOTOR CYCLE	$\times\!\!\times\!\!\times\!\!\times\!\!\times$	MADE IN	THAILAND
D.			TE034420N9

12)

TE03304D S

13)



56071-1044

TE03301FN9 S

14) KL650H/L

NOTICE

Do not sit on the saddlebag.

56071-0758

TE03857E S

15) KL650H/L

A WARNING

DO NOT EXCEED SADDLE BAC MAXIMUM LOAD 5 kg (11 lbs)

- Do not exceed the total payload imit shown in the Owner's Manual and tire information label.
- Road your Owner's Manual for more detailed and complete instruction.
- Do not exceed the vehicle speed of '30 km/h (80 mph) when carrying a passenger and/or cargo. A spireduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident.

56071-0941

16) KL650J




DO NOT EXCEED TOP-CASE
MAXIMUM LOAD 5 kg (11 lbs)

- ◆Do not exceed the total payload limit shown in the Owner's Manual and tire information label.
- Read your Owner's Manual for more cetailed and complete instruction.
- Do not exceed the vehicle speed of 130 km/h (80 mph) when corrying a bassenger and/or cargo. Also reduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident.

56071-0940

TE03271FN7 S TE03295FN7 S


Location of Parts

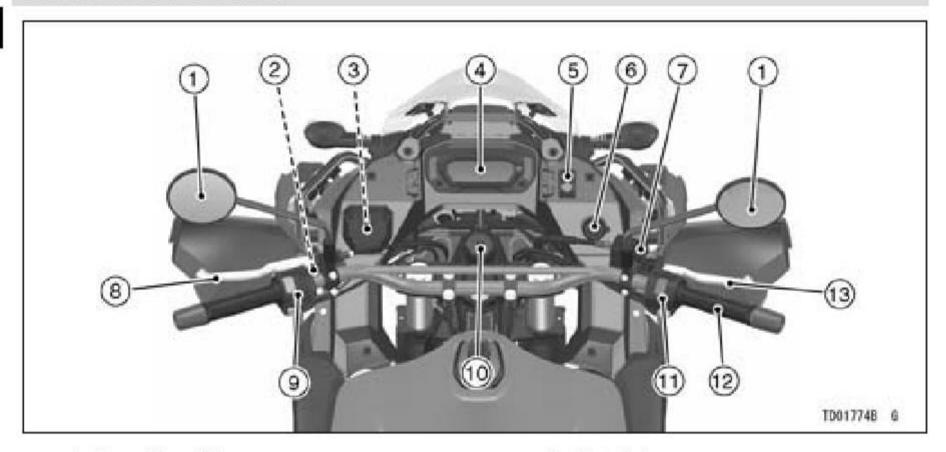

- 1. Rear View Mirrors
- 2. Starter Lockout Switch
- 3. USB Socket (KL650H/L)
- 4. Meter Instrument
- 5. Fog Light Switch (KL650H/L)
- 6. DC Output (KL650H/L)
 7. Brake Fluid Reservoir (Front)

- 8. Clutch Lever
- 9. Left Handlebar Switches
- 10. Ignition Switch/Steering Lock
- 11. Right Handlebar Switches
- 12. Throttle Grip
- 13. Front Brake Lever

KL650F/G/J

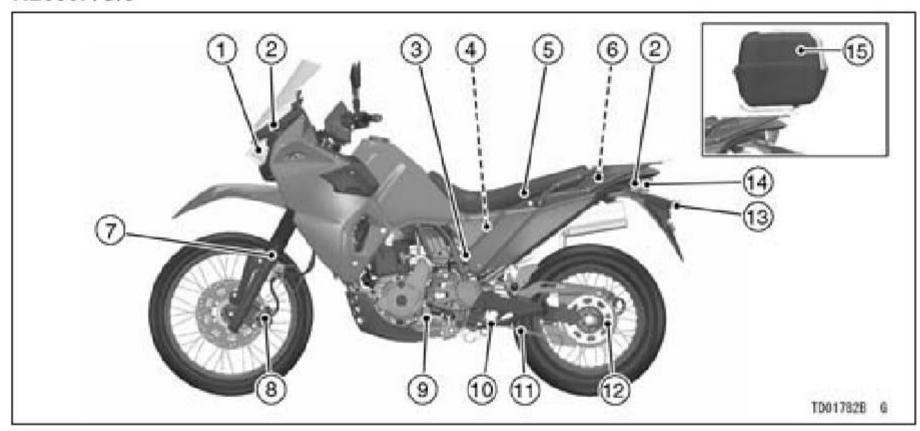


- Headlight
 Turn Signal Lights
 Rear Shock Absorber
- 4. Battery
- 5. Seat

- 6. Tool Kit
- 7. Front Fork
- 8. Brake Caliper (Front)
- 9. Shift Pedal
- 10. Side Stand

- 11. Drive Chain

- 12. Chain Adjuster
 13. License Plate Light
 14. Brake/Tail Light
 15. Top Case (KL650J)

KL650F/G/J

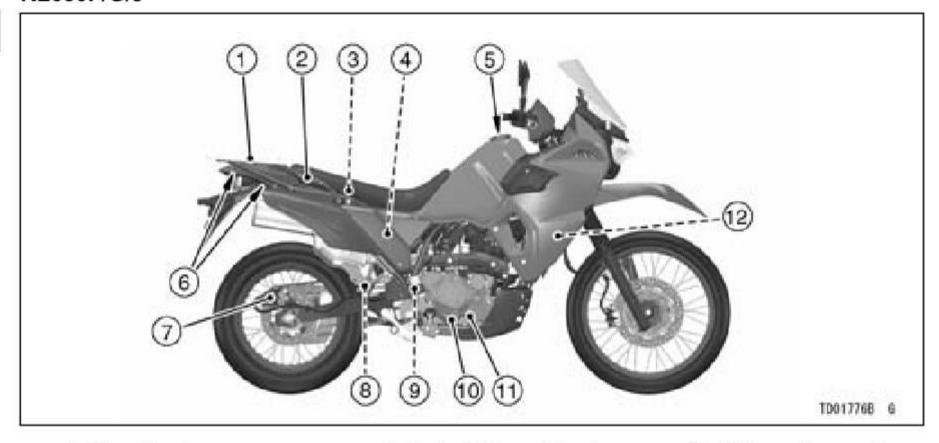


- 1. Rear Carrier
- 2. Grab Rail
- 3. Fuse Boxes
- 4. Air Cleaner
- 5. Fuel Tank Cap
- 6. Tie Hooks

- 7. Brake Caliper (Rear) 8. Brake Fluid Reservoir (Rear)
- 9. Rear Brake Light Switch
- 10. Brake Pedal

- 11. Oil Level Inspection Window
- 12. Coolant Reserve Tank


KL650H/L

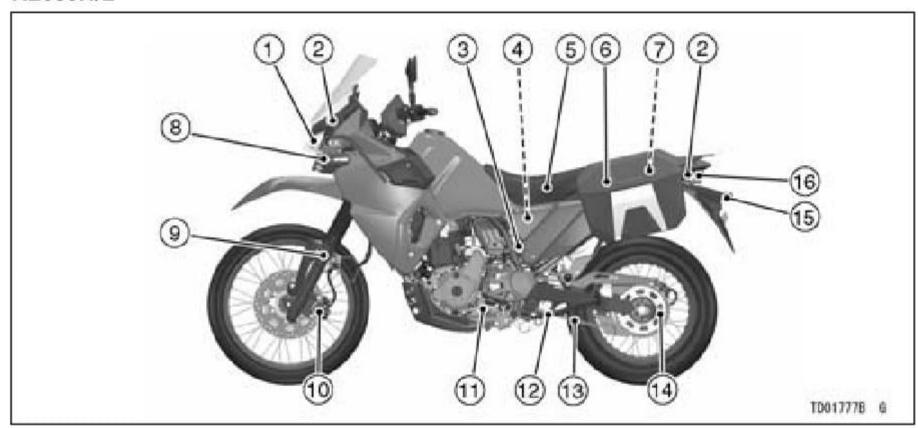

- 1. Headlight
- 2. Turn Signal Lights
 3. Rear Shock Absorber
- 4. Battery
- 5. Seat
- 6. Saddlebag
- 7. Tool Kit
- 8. Fog Light

- 9. Front Fork
- 10. Brake Caliper (Front) 11. Shift Pedal
- 12. Side Stand
- 13. Drive Chain
- 14. Chain Adjuster
- 15. License Plate Light 16. Brake/Tail Light

KL650H/L

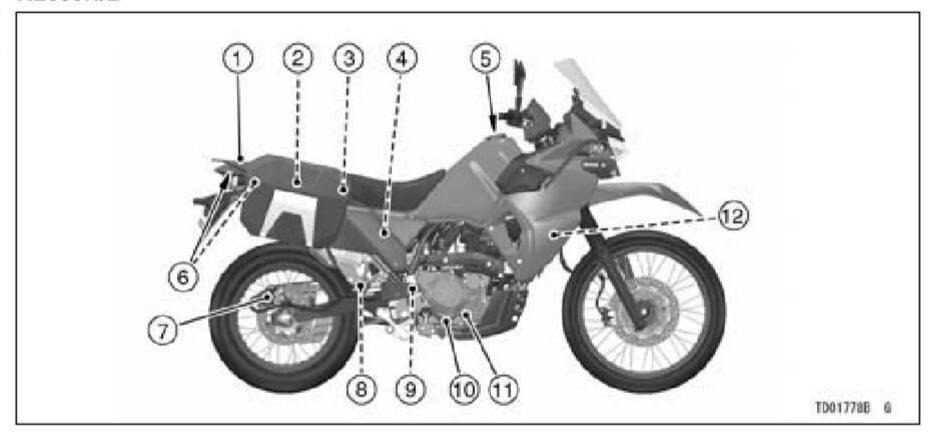

- 1. Rear Carrier
- 2. Grab Rail
- 3. Fuse Boxes
- 4. Air Cleaner
- 5. Fuel Tank Cap
- 6. Tie Hooks


- 7. Brake Caliper (Rear) 8. Brake Fluid Reservoir (Rear)
- 9. Rear Brake Light Switch
- 10. Brake Pedal

- 11. Oil Level Inspection Window
- 12. Coolant Reserve Tank

Meter Instruments

- 1. Fuel Gauge
- 2. Clock
- 3. Speedometer
- 4. Left Meter Button
- 5. Multifunction Display
- Odometer
- Trip Meter A/B
- 6. Right Meter Button


When the ignition switch is turned on, all LCD functions are shown for a few seconds, then the multifunction meter turns to operational mode.

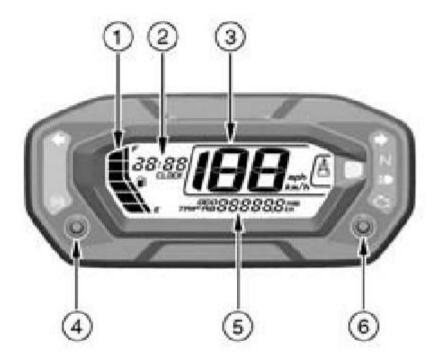


Indicators

- 1. Left Turn Signal Indicator (Green)
- 2. E Battery Warning Indicator
- 3. La Coolant Temperature Warning Indicator
- 4.

 → Right Turn Signal Indicator (Green)
- Neutral Indicator (Green)
- 6. B High Beam Indicator (Blue)
- 7. C Engine Warning Indicator (Yellow)
- 8. Warning Indicator (Red)
- 9. Fuel Level Warning Indicator
- 10. (S) ABS Indicator (Yellow) (ABS model)

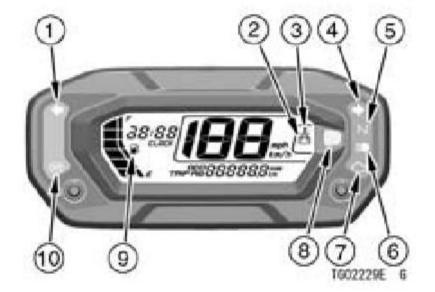

Indicator Initial Operation

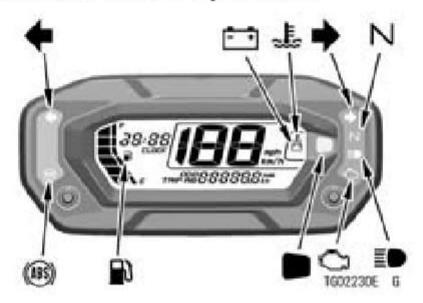

When the ignition switch is turned on, all indicators go on/off as shown in the table. If any indicator does not operate as shown, have it checked by an authorized Kawasaki dealer.

ON	Z	D	Indicators
		_	N ® * B }
		•	
	•	Ē	
	•	•	■● ◆ →

ON: When ignition switch is turned on.

: After a few seconds

: When engine starts.

□: Goes on.

: Goes off.

*: goes off shorty after the motorcycle starts moving.

When Warning Indicators Go On or Blink

When warning indicators appear, there could be a problem with vehicle function. Follow actions in the table after stopping the vehicle in a safe place.

*: The numbers in this column corresponds to reference numbers on page 48.

*No.	Indica- tors	Status	Actions
8 2	<u> </u>	ON	These indicators go on if the battery voltage is less than 11.0 V or more than 16.0 V. If the voltage is less than 11.0 V, charge the battery. If it does not solve the problem, contact an authorized Kawasaki dealer.
8 3	.	ON	These indicators go on whenever the coolant temperature rises too high when the motorcycle is in operation. Stop the engine and check the coolant level in the reserve tank after the engine cools down. If the amount of coolant is insufficient, add coolant to the reserve tank. Contact an authorized Kawasaki dealer.
7	Ç	ON	The DFI system has malfunctioned. Contact an authorized Kawasaki dealer.

*No.	Indica- tors	Status	Actions
10	(A83)	ON	ABS indicator may go on under following specific condition*1. If this indicator appears, first turn the ignition switch off, and then back on, and ride the motorcycle at 5 km/h (3.1 mph) or more. The ABS indicator should then go off. If it does not, the ABS may has malfunctioned. ABS will not work but conventional brakes function. Contact an authorized Kawasaki dealer.
9		Blink (with lowest segment)	Approximately 3.8 L (1.0 US gal) of usable fuel remains. Refuel at the earliest opportunity. If the vehicle is on the side stand, the warning indicator cannot estimate the amount of fuel in the tank. Stand the vehicle upright to check the fuel level.
		Blink (with all segments)	The fuel level warning system has malfunctioned. Contact an authorized Kawasaki dealer.

- *1: O After continuous riding on a rough road.
 - OWhen the engine is started with the stand raised and the transmission engaged, and the rear wheel turns.
 - OWhen accelerating so abruptly that the front wheel leaves the ground.
 - OWhen the ABS has been subjected to strong electrical interference.
 - OWhen tire pressure is abnormal. Adjust tire pressure.
 - OWhen a tire different in size from the standard size is being used. Replace with standard size.
 - OWhen the wheel is deformed. Replace the wheel.

Other Indicators

*No.	Indicators	Status	
1	+	When the turn signal switch is pushed to the left, this indicator blinks.	
4	+	When the turn signal switch is pushed to the right, this indicator blinks.	
5	Z	When the transmission is in neutral, this indicator goes on.	
6		When the headlight is on high beam, this indicator goes on.	

Speedometer



A. Speedometer

Speedometer

The speedometer is digital and can be set for km/h or mph.

The unit setting can be changed according to local regulations. Make sure the unit setting (km/h or mph) is correctly displayed before riding.

Refer to the Unit Setting in the Display Setting section.

Display Setting

$\hat{m{m{\Lambda}}}$ warning

For safety, do not operate the meter buttons while riding the motorcycle.



Multifunction Display

 Push the left meter button to select the items shown below. The display items are switched in the following order. Odometer Trip Meter A Trip Meter B



:Flow when pushing left meter button

Odometer




The odometer shows the total distance. This meter cannot be reset.

NOTE

OWhen the figures come to 999999, the display is stopped and locked.

Trip Meter

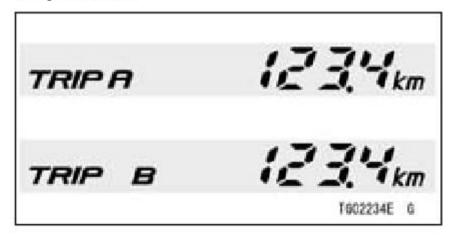

The trip meter shows the distance traveled since it was reset.

NOTE

OWhen the trip meter reaches 9999.9 while riding, the meter resets to 0.0 and continues counting.


How to Reset

- Switch the multifunction display to the trip meter.
- Push the left meter button and hold it in until the display turns to 0.0.

Unit Setting

Display the correct speed unit according to local regulations.

- Switch the multifunction display to the odometer.
- Push the right meter button while pushing the left meter button to switch the speed unit.

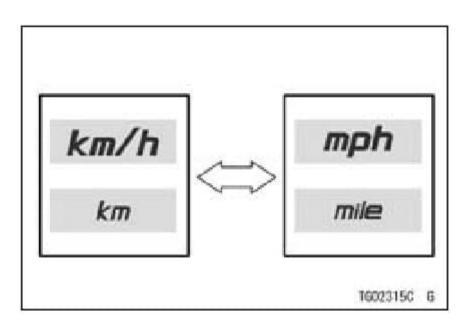

Clock Setting


The clock can be selected from the 12h mode and 24h mode.

NOTE

OWhen the battery is disconnected, the clock is reset to 1:00 (12h mode) or 13:00 (24h mode) and starts working again when the battery is connected.

To adjust the clock:

- Push the right meter button and hold it until shifting to the clock setting mode. The hour and minute displays starts blinking.
- Push the right meter button to select the hour or minute digits.
- Push the left meter button to adjust the hour or minute digits.
- To finish the adjustment, push the left meter button while blinking the hour and minute digits.

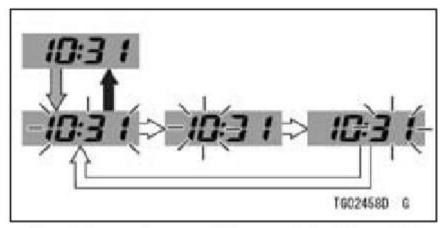


: Flow when pushing and holding right meter button

: Flow when pushing left meter button : Flow when pushing right meter button

To change 12h/24h mode:

- During blinking the hour and minute digits, push the right meter button and hold it. The current mode (12h or 24h) appears.
- Push the left meter button to select the mode.
- Push the right meter button to return to the clock adjustment.

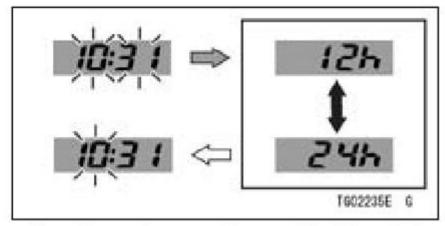

: Flow when pushing and holding right meter button


: Flow when pushing left meter button

: Flow when pushing right meter button

Features

Fuel Gauge

The fuel in the fuel tank is shown by the number of segments displayed.

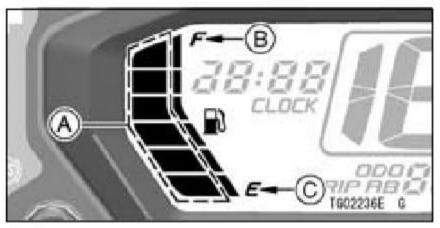

A. Segments

B. F (Full)


C. E (Empty)

NOTE

- O When the fuel tank is full, all the segments are displayed. As the fuel level in the tank goes down, the segments disappear one by one from F (full) to E (empty).
- O When the fuel level warning indicator and bottom segment blink, refer to the "When Warning Indicators Go On or Blink" of Indicators in this chapter.

Keys

You will need the key number or spare key to have a duplicate made.

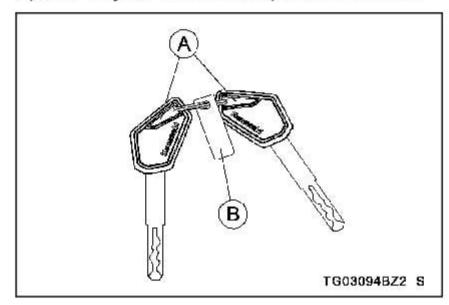

A. Ignition Key B. Key Number Tag


If you lose all keys and the key number, you will need to replace the ignition switch and all other locks operated by that key.

Contact your Kawasaki dealer to purchase additional spare keys.

Ignition Switch/Steering Lock

This is a three-position, key-operated switch.


The key can be removed when it is in the "OFF" or "LOCK" position.

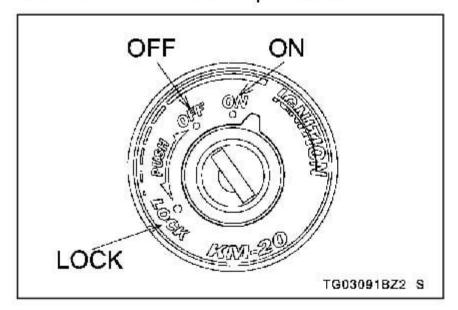

ON	 Engine can be started. All electrical equipment can be used. Key cannot be removed.
OFF	 Engine off. Electrical equipment is off. Key can be removed.
LOCK	 Steering locked. Engine off. Electrical equipment is off. Key can be removed.

For Locking:

- 1. Turn the handlebars fully to the left.
- Push the key down in the "OFF" position and turn it to "LOCK."

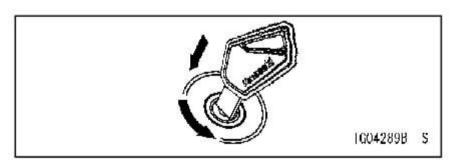

riangle Warning


Turning the ignition switch to the "OFF" position while riding the motorcycle shuts down the entire electrical system (headlight, brake light, turn signal light, etc.) and the engine will stop, which could cause an accident resulting in severe injury or death. Never operate the ignition switch while riding the motorcycle; only operate it when the motorcycle is at a standstill.

NOTE

- O The tail, city and license plate lights are on whenever the ignition key is in the "ON" position. The headlight goes on when the starter button is released after starting the engine.
- O Do not leave the ignition switch at the "ON" position for an extended time

- with the engine stopped, or the battery may become totally discharged.
- ODo not leave the hazard lights switched on for a long time with-out the engine running or the battery will become discharged.

Right Handlebar Switches

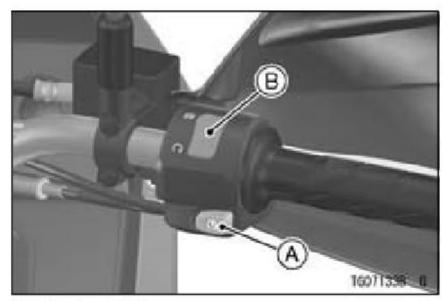

A. Starter Button
B. Engine Stop Switch

Starter Button _______

Refer to the Starting the Engine section in the HOW TO RIDE THE MOTORCYCLE chapter for starting instructions.

Engine Stop Switch


To stop the engine in an emergency, move the engine stop switch to the position.

Ordinarily, the engine stop switch must be in the _O_ position for the motorcycle to operate.

NOTE

- Ordinarily, the ignition switch should be used to stop the engine.
- O Although the engine stop switch stops the engine, it does not turn off all the electrical circuits and eventually the battery will be discharged.

Left Handlebar Switches

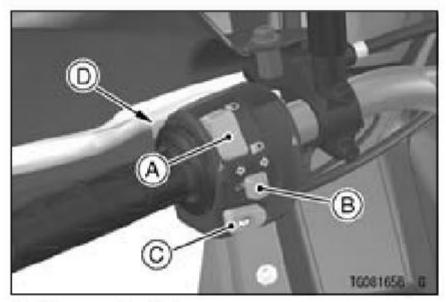

- A. Dimmer Switch
- B. Turn Signal Switch
- C. Horn Button
- D. Passing Button

Dimmer Switch

High or low beam can be selected with the dimmer switch.

High beam...
□ (High beam indicator: see Meter Instruments section)

Low beam... D

NOTE

ODo not allow anything to cover the headlight lens when the headlight is on. If covered, heat can build up in the headlight lens causing lens discoloration or melting, as well as damage to the item covering the lens.

Turn Signal Switch

When the turn signal switch is turned to the left (⇔) or right (⇒) the corresponding turn signal lights and turn signal indicator blinks. To cancel the turn signal, push the switch in.

Horn Button 🛏

When the horn button is pushed, the horn sounds.

Passing Button PASS

The high beam turns on only while the passing button is pushed.

Fuel

⚠ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions, creating the potential for serious burns. Turn the ignition switch off.

Do not smoke.

Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

Fuel Requirements

Use clean, fresh unleaded gasoline with the following conditions.

- Antiknock Index of 87 or more
- Up to 10% of ethanol contained

NOTICE

Use only unleaded gasoline. leaded Never use gasoline. Leaded gasoline significantly reduces the capability of the catalytic converter in the exhaust system.

NOTICE

Use minimum of 87 octane gasoline only to prevent severe engine damage.

If engine "knocking" or "pingdifferent ing"occurs, use a brand of gasoline of a higher octane rating. If this condition is allowed to continue it can lead to severe engine damage. Gasoline quality is important. Fuels of low quality or not meeting standard industry specifications may result in unsatisfactory performance. Operating problems that result from the use of poor quality or nonrecommended fuel may not be covered under your warranty.

NOTICE

Avoid using blends of unleaded gasoline and methanol (wood alcohol) whenever possible, and never use "gasohol" containing more than 5% methanol.

Fuel system damage and perfor-

Fuel system damage and performance problems may result.

NOTE

Other oxygenates approved for use in unleaded gasoline include TAME (up to 16.7%) and ETBE (up to 17.2%). Fuel containing these oxygenates can also be used in your Kawasaki.

Never use gasoline with an octane rating lower than the minimum specified by Kawasaki. Never use "gasohol" with more than 10% ethanol, or more than 5% methanol.

Gasoline containing methanol must also be blended with cosolvents and corrosion inhibitors. Certain ingredients of gasoline may cause paint fading or damage. Be extra careful not to spill gasoline or gasoline oxygenate

When not operating vour Kawasaki for 30 to 60 days, mix a fuel stabilizer (such as STA-BIL) with the gasoline in the fuel tank. Fuel stabilizer additives inhibit oxidation of the fuel which minimizes gummy deposits.

blends during refueling.

Fuel Type and Octane Rating

Use clean, fresh unleaded gasoline. The Antiknock Index is posted on service station pumps. The octane rating of a gasoline is a measure of its resistance to detonation or "knocking." The Antiknock Index is an average of the Research Octane Number (RON) and the Motor Octane Number (MON) as shown in the table.

Fuel Type	Unleaded Gasoline	
Ethanol Content	E10 or less	
Antiknock Index	87 or more	

Do not use any fuel that contains more ethanol or other oxygenates than specified for E10 fuel* in this vehicle. Damage to the engine and fuel system, or engine starting and/or performance problems may result from the use of improper fuel.

*E10 means fuel containing up to 10% ethanol.

Filling the Tank

Avoid filling the tank in the rain or where heavy dust is blowing so that the fuel does not get contaminated.

$\hat{m{\Lambda}}$ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions, creating the potential for serious burns. Turn the ignition switch off. Do not smoke.


Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light. Never fill the tank completely to the top.

If the tank is filled completely to the top, heat may cause the fuel to expand and overflow through the vents in the tank cap.


After refueling, make sure the tank cap is closed securely. If gasoline is spilled on the fuel tank, wipe it off immediately.

California model only: Never fill the tank so the fuel level rises into the filler neck. If the tank is overfilled, heat may cause the fuel to expand and flow into the Evaporative Emission Control System resulting in hard starting, engine hesitation and non-compliance with the emission regulation.

- Lift the key hole cover.
- Insert the ignition key into the fuel tank cap.
- Turn the key clockwise while pushing down the fuel tank cap.

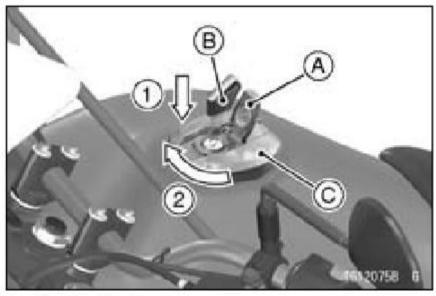

- A. Key Hole Cover
- B. Ignition Key
- C. Fuel Tank Cap
- Open the fuel tank cap.
- Add fuel.

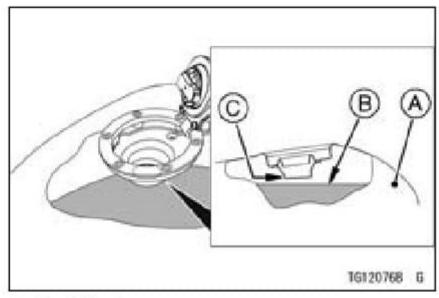

- A. Fuel Tank
- B. Top Level
- C. Bottom of Filler Neck (Maximum Fuel Level)

NOTE

- ODo not exceed the maximum fuel level as shown.
- Push the fuel tank cap down into place with the key inserted.

- The key can be removed by turning counterclockwise to the original position.
- Close the key hole cover.

NOTICE

Never fill the tank completely to the top.

If the tank is filled completely to the top, heat may cause the fuel to expand and overflow through the vents in the tank cap.

After refueling, make sure the tank cap is closed securely. If gasoline is spilled on the fuel tank, wipe it off immediately.

NOTE

 The fuel tank cap cannot be closed without the key inserted, and the key

- cannot be removed unless the cap is locked properly.
- ODo not push on the key to close the cap, or the cap cannot be locked.

Side Stand

Always kick the stand fully up before moving the motorcycle. The engine will stop automatically if the motorcycle is in gear and the clutch is released with the side stand down.


NOTE

- O When using the side stand, turn the handlebars to the left.
- O Make sure the side stand is down securely before leaving the motorcycle.
- ODo not sit on the motorcycle while it is on its side stand.

Seat

Seat Removal

- Remove the bolt, collar and damper on both sides
- Lift up the rear part of the seat, and remove it backward.

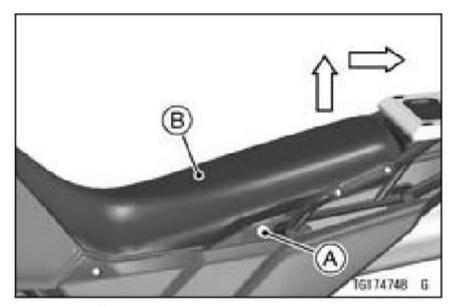


A. Bolt, Collar and Damper

B. Seat

Seat Installation


 Insert the front hook to the stopper on the fuel tank.

Insert the center hook under the fuel tank bracket.

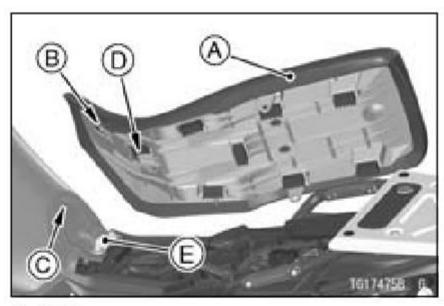

- A. Seat
- **B. Front Hook**
- C. Stopper
- D. Center Hook
- E. Fuel Tank Bracket
- Install the damper and collar on both sides.

Tighten the bolt on both sides.

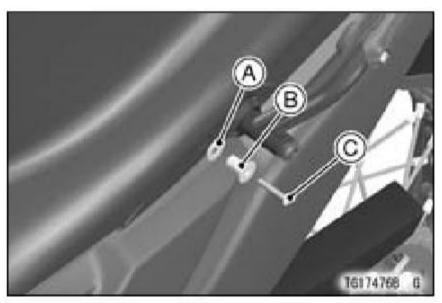


- A. Damper
- B. Collar
- C. Bolt
- Pull up the front and rear ends of the seat to make sure they are securely locked.

Windshield

The windshield can be adjusted in height to suit the rider's preference.

Windshield Height Adjustment


- Remove the bolts and washers.
- Remove the windshield.

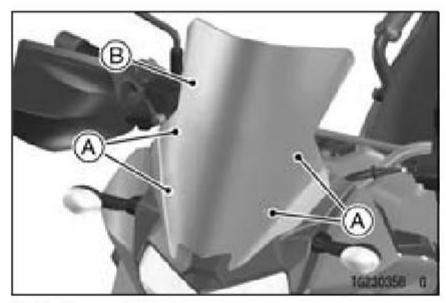

A. Bolts and Washers B. Windshield


Remove the bolts.

Remove the windshield brackets.

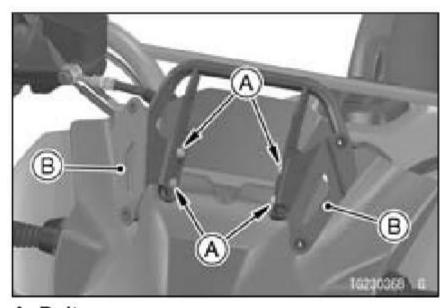

A. Bolts
B. Windshield Brackets

- Install the windshield bracket on the both sides.
- Tighten the bolts on both sides.

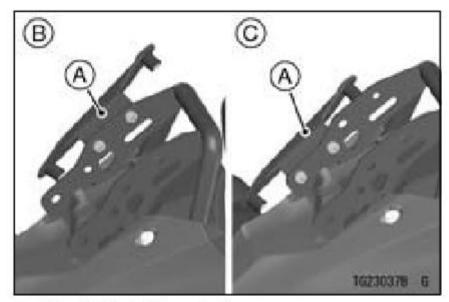


- A. Windshield Bracket
- **B. High Position**
- C. Low Position
- Install the windshield.
- Tighten the bolts with washers.

Tool Kit

The tool kit is stored in the tool kit bag.

Insert the ignition key into the lid lock.

 Open the lid while turning the key clockwise.

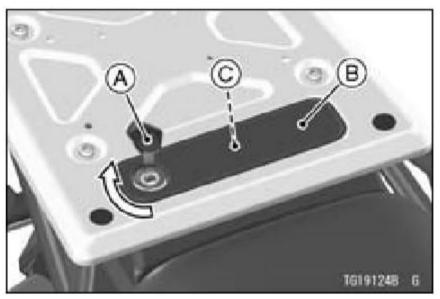


- A. Ignition Key
- B. Lid
- C. Tool Kit

Saddlebags (KL650H/L)

The saddlebags are provided at both sides of the rear wheel to carry baggage.

To open the saddlebag lid

- Insert the ignition key into the key cylinder.
- Turn the ignition key to the sition.
- Open the saddlebag lid while pulling the lid lock.

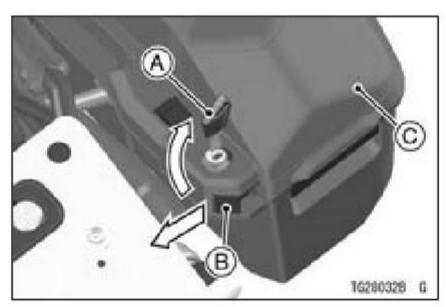

A. Ignition Key B. Lid Lock

C. Saddlebag Lid


To close the saddlebag lid

- Close the saddlebag lid, and lock it.
- Turn the ignition key to the position, and remove it.
- Make sure that the saddlebag lid is securely locked.

To remove the saddlebag

- Insert the ignition key into the key cylinder.
- Turn the ignition key to the position.
- Remove the saddlebag while pushing the saddlebag lock.


74 GENERAL INFORMATION

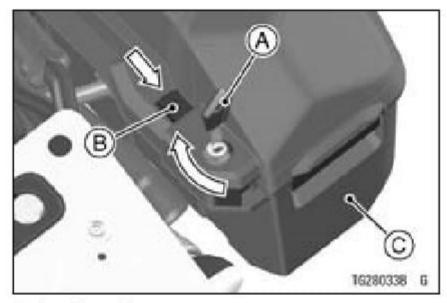

- A. Ignition Key
- B. Saddlebag Lock
- C. Saddlebag

To install the saddlebag

- While aligning the holder on the lower of the saddlebag with the saddlebag stay, hook the holder on the front of the saddlebag to the saddlebag stay.
- While pushing the saddlebag lock, fit the holder on the rear of the saddlebag to the saddlebag stay.
- Release the saddlebag lock.

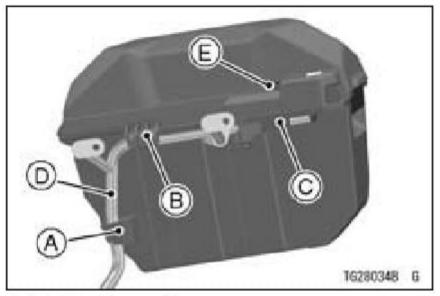

- A. Holder (Lower)
- B. Holder (Front)
- C. Holder (Rear)
- D. Saddlebag Stay
- E. Saddlebag Lock
- Make sure that the saddlebag is securely locked.

NOTE

Of the saddlebag is not securely locked, the orange warning mark at the saddlebag lock portion will appear. Reinstall the saddlebag. Turn the ignition key to the position, and remove it.

A WARNING

Overloading the motorcycle with cargo and/or passengers, and/or not balancing the weight of items carried in each saddlebag may cause adverse handling, loss of control and an accident resulting in serious injury or death. Do not carry loads of more than 5 kg (11 lb) in each saddlebag. Distribute the load equally on both sides of the motorcycle to minimize imbalance. Do not exceed the total payload limit of 182 kg (401 lb), including rider, passenger, baggage, and accessories. Do not exceed the vehicle speed of 130 km/h (80 mph) when carrying a passenger and/or cargo. Also reduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident.

MARNING


Riding with an open saddlebag lid could allow clothing or other objects to fall into the rear wheel, resulting in rear wheel lockup and loss of control. Keep both saddlebag lids securely locked when riding.

NOTICE

Do not sit on the saddlebags and their lids. Do not put load on the lids.

Rear Carrier/Tie Hooks

This motorcycle is equipped with the rear carrier. The tie hooks are located under the rear carrier.

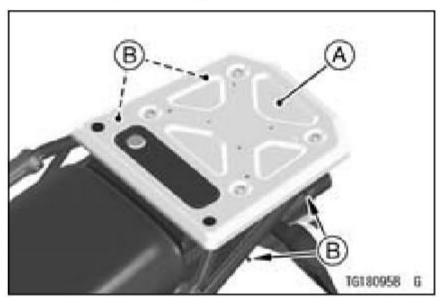

A. Rear Carrier B. Tie Hooks

${f lue{1}}$ WARNING

Overloading the motorcycle with cargo and/or passengers, and/or not balancing the weight of items carried on the rear carrier may cause adverse handling, loss of control and an accident resulting in serious injury or death. Do not carry loads of more than 9 kg (20 lb) on the rear carrier. Do not exceed the total payload limit of 182 kg (401 lb), including rider, passenger, baggage, and accessories. Do not exceed the vehicle speed of 130 km/h (80 mph) when carrying a passenger and/or cargo. Also reduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident.


78 GENERAL INFORMATION

Top Case (KL650J)

The top case is provided at the rear of motorcycle to carry baggage.


To open the top case lid

- Insert the ignition key into the key cylinder.
- Turn the ignition key to the | 1 position.
- Pull up the handle.

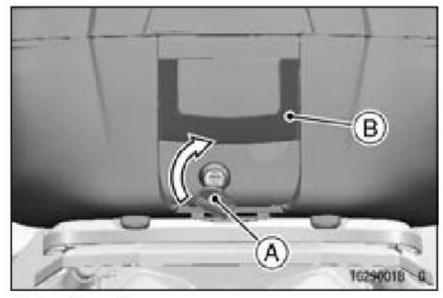

A. Ignition Key B. Handle

 Open the top case lid while pulling the release lever.

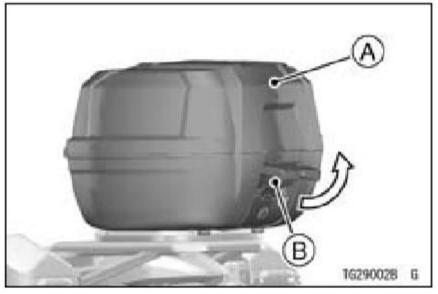

A. Top Case Lid B. Release Lever


To close the top case lid

- Close the top case lid, and push it down to lock it.
- Pull down the handle.
- Turn the ignition key to the position, and remove it.

 Make sure that the top case lid is securely locked.


To remove the top case

- Insert the ignition key into the key cylinder.
- Turn the ignition key to the sition.
- Pull up the handle.

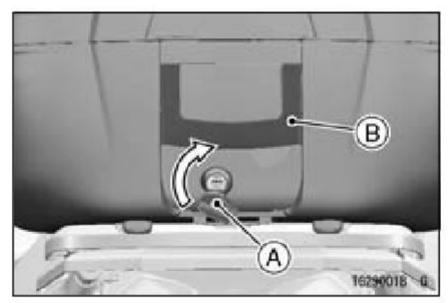

A. Ignition Key B. Handle

- While pulling the lock lever on the top case, pull up the rear part of the top case to clear the hook.
- Remove the top case backward to clear the hooks.

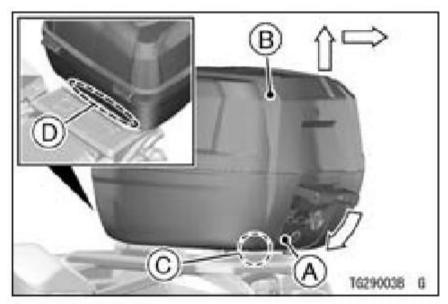


- A. Lock Lever
- B. Top Case
- C. Hook
- D. Hooks

80 GENERAL INFORMATION

To install the top case

- Insert the hooks of the top case into the slots of the plate.
- While pulling the lock lever on the top case, insert the hook of the plate into the lock portion of the top case.
- Release the lock lever.
- Make sure that the top case is securely locked.
- Pull down the handle.
- Turn the ignition key to the position, and remove it.

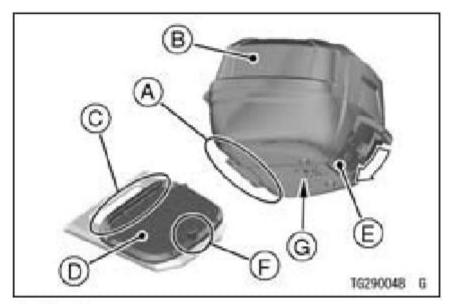

- A. Hooks
- B. Top Case
- C. Slots
- D. Plate
- E. Lock Lever
- F. Hook
- G. Lock Portion

${f lue{1}}$ WARNING

Overloading the motorcycle with cargo and/or passengers, and/or not balancing the weight of items carried in the top case may cause adverse handling, loss of control and an accident resulting in serious injury or death. Do not carry loads of more than 5 kg (11 lb) in the top case. Do not exceed the total payload limit of 182 kg (401 lb), including rider, passenger, baggage, and accessories. Do not exceed the vehicle speed of 130 km/h (80 mph) when carrying a passenger and/or cargo. Also reduce speed according to road or weather condition, etc. Failure to adjust the speed to compensate for added weight and other conditions may result in a loss of control and subsequent accident.


Rear View Mirrors

Rear View Mirror Adjustment

- Adjust the rear view mirror by slightly moving only the mirror portion of the assembly.
- If the rear visibility cannot be assured by moving the mirror, slide the rubber boot up, and loosen the locknut and turn the stay by hand.

NOTE


- O The locknut has left hand threads.
- Tighten the locknut securely.

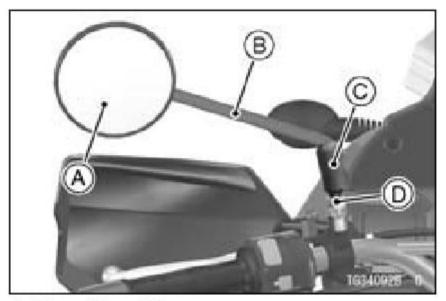

- A. Rear View Mirror
- B. Stay
- C. Rubber Boot
- D. Locknut

Fog Lights (KL650H/L)

This motorcycle is equipped with the fog lights. The fog lights can be turned on by pushing the fog light switch when the ignition switch is in the "ON" position.

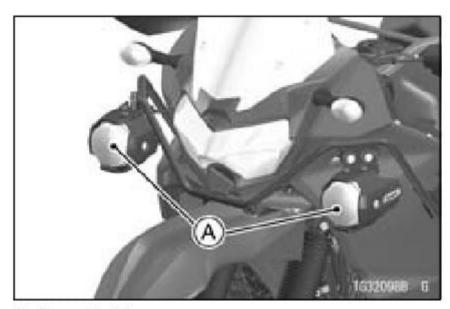


A. Fog Lights

Fog Light Switch

 Push the fog light switch, and the fog lights go on.

NOTE


OWhen the fog light switch is turned on, the indicator of the fog light switch goes on.

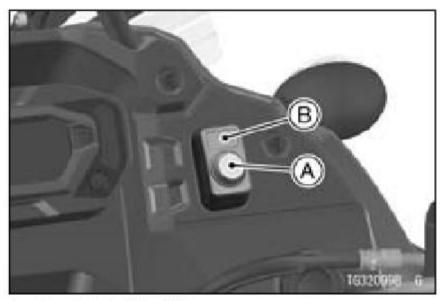

A. Fog Light Switch B. Indicator

DC Output (KL650H/L)

The electric power of the battery can be used through the DC output. Observe and follow the notes listed below.

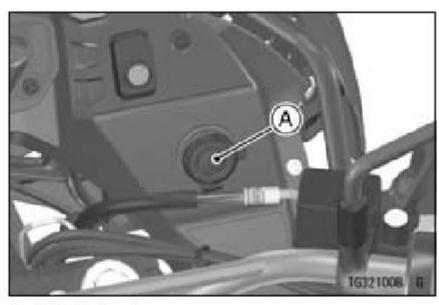

A. DC Output

If using an accessory in the socket, unless it has a waterproof connection, do not operate this motorcycle in the rain or wash it. Always put the cap on the socket when the accessory is not used.

NOTICE

Do not connect a load that exceeds the maximum load to this accessory circuit or the battery may become discharged, even with the engine running.

 Check that the maximum load and fuse rating of the accessory circuit before using the accessory parts (see Electrical Accessory Connectors section).


USB Socket (KL650H/L)

The electric power of the battery can be used through the USB socket. Observe and follow the notes below.

NOTE

 The USB socket can be used with the USB socket cover closed.

- O You should use a small device connector to close the USB socket cover.
- O Route the wires of the device through the guide.

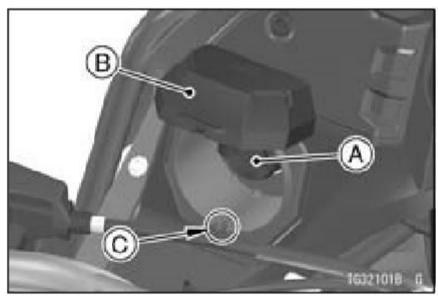

- A. USB Socket
- B. USB Socket Cover
- C. Guide

- When connect the USB socket, if the wires of the device connected get caught, the device may be damaged.
- When disconnect the USB socket, follow the instructions provided with your equipment.

- To prevent battery discharge, do not use the USB socket for longer than necessary when the engine is not running.
- Maximum total amperage of the USB socket is 2 A.
- This USB socket is not waterproof. To prevent an electrical short, do not use the USB socket when riding in the rain, washing the motorcycle or when the socket could otherwise get wet.
- Always close the USB socket cap and USB socket cover when the USB socket is not in use.


 Check that the maximum load and fuse rating of the accessory circuit before using the accessory parts (see Electrical Accessory Connectors section).

Electrical Accessory Connectors


The electric power of the battery can be used through the electrical accessory connectors.

NOTE

- Some models require a relay to use the electrical accessory connectors.
- The electrical accessory connection to the connectors should be done by an authorized Kawasaki dealer.

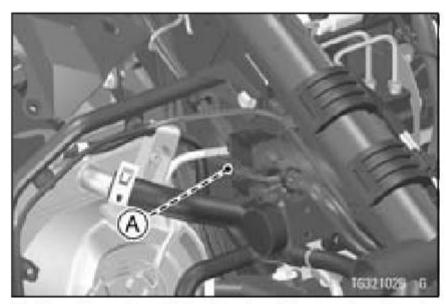


A. For Genuine Grip Heater (Under the Fuel Tank)

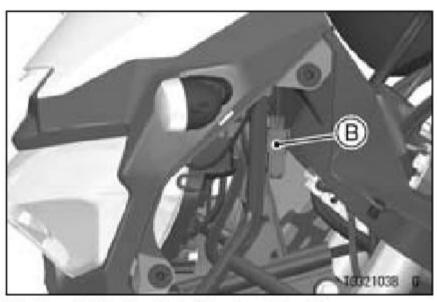

B. For USB Socket (Back of Left Lower Fairing)

88 GENERAL INFORMATION

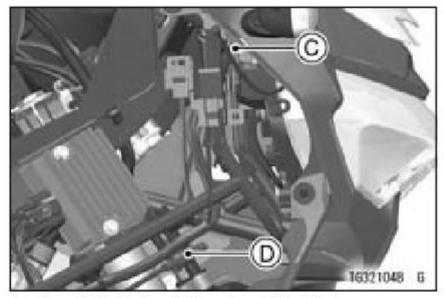

C. For DC Output (Back of Right Lower Fairing)

D. For Genuine	Fog	Light	(Back	of	Right
Lower Fairing	g)				

Accessory Socket/Con- nectors		ocket/Con- mum		Fuse Rating	
Α	For Genuine Grip Heater	28 W			
В	For USB Socket	0 ~ 10 W	80 W	15 A	
С	For DC Output	0 ~ 26 W	00 VV	15 A	
D	For Genuine Fog Light	16 W			

NOTICE

Do not install a fuse of a higher rating than that specified. Do not connect a load that exceeds the maximum load to this accessory circuit or the battery may become discharged, even with the engine running.

HOW TO RIDE THE MOTORCYCLE

Break-In

The first 1 000 km (600 miles) of use is the break-in period.

Follow the recommendations below to maintain the vehicle's performance and longevity.

Unit: km/h (mph)

Travelled distance	Gear position					
Travelled distance	1st	2nd	3rd	4th	5th	
0 ~ 200 km (0 ~ 150 miles)	33 (21)	52 (32)	66 (41)	79 (49)	95 (59)	
200 ~ 350 km (150 ~ 250 miles)	50 (31)	78 (48)	99 (62)	118 (73)	142 (88)	
350 ~ 1 000 km (250 ~ 600 miles)		Ride moderately				

NOTE

- O You can ride above the maximum speed stated in the break-in table briefly if necessary. Brief periods above the listed speed will not affect break-in results.
- When travelling on public roads, obey the speed limits.

90 HOW TO RIDE THE MOTORCYCLE

ODo not race the engine while the transmission is in neutral.


MARNING

New tires are slippery and may cause loss of control and injury. A break-in period of 160 km (100 miles) is necessary to establish normal tire traction. During break-in, avoid sudden and maximum braking and acceleration, and hard cornering.

In addition to the above, at 1 000 km (600 miles) it is extremely important that the owner has the initial maintenance service performed by an authorized Kawasaki dealer.


Starting the Engine

 Check that the engine stop switch is in the _____position.

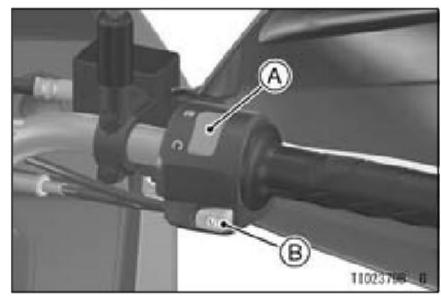

A. Engine Stop Switch B. Starter Button

- Turn the ignition key to "ON" position.
- Make sure the transmission is in neutral.

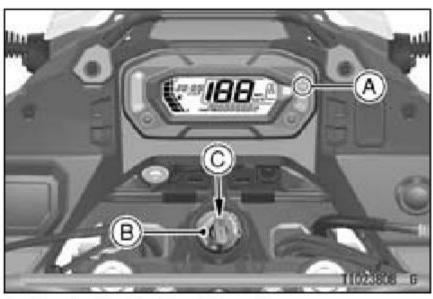

- A. Neutral Indicator (Green)
- **B.** Ignition Switch
- C. ON Position

NOTE

OWhile the engine is cold, the fast idle system automatically raises the engine idling speed. At this time, the engine warning indicator () may go on if you operate the throttle grip unnecessarily.

92 HOW TO RIDE THE MOTORCYCLE


- The motorcycle is equipped with a vehicle-down sensor which causes the engine to stop automatically if the motorcycle falls down. After righting the motorcycle, first turn the ignition key to the "OFF" position and then back to the "ON" position before starting the engine.
- Without holding the throttle grip, push the starter button to start the engine.

NOTICE

Do not operate the starter continuously for more than 5 seconds, or the starter will overheat and the battery power will drop temporarily. Wait 15 seconds between each operation of the starter to let it cool and the battery power recover.

NOTE

• The motorcycle is equipped with a starter lockout switch. This switch is designed so that the engine does not start if the transmission is in gear and the side stand is down. However, the engine can be started if the clutch lever is pulled and the side stand is fully up.

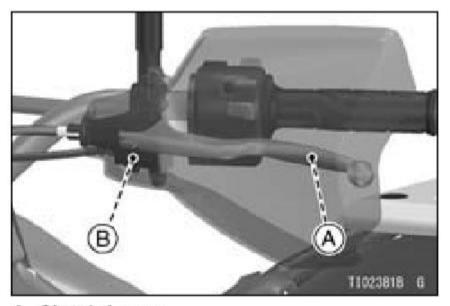

A. Clutch Lever

B. Starter Lockout Switch

Do not let the engine idle longer than 5 minutes, or engine overheating and damage may occur.

Moving Off

- Check that the side stand is up.
- Pull in the clutch lever.
- Shift into 1st gear.
- Open the throttle a little, and start to let out the clutch lever very slowly.
- As the clutch starts to engage, open the throttle a little more, giving the engine just enough fuel to keep it from stalling.


NOTE

- O Warm up the engine thoroughly before the riding or revving the engine.
- OThe motorcycle is equipped with a side stand switch. This switch is designed so that the engine does not start if the transmission is in gear and the side stand is down.

Shifting Gears

- Close the throttle while pulling in the clutch lever.
- Shift into the next higher or lower gear.

94 HOW TO RIDE THE MOTORCYCLE

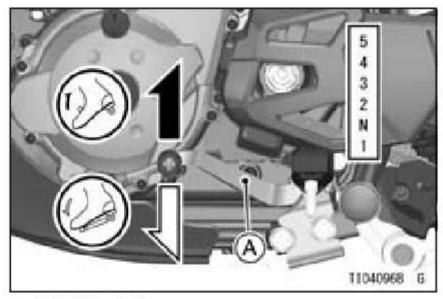

A. Shift Pedal

- Open the throttle part way, while releasing the clutch lever.
- For smooth riding, each gear position should cover the proper rate of speed shown in the table.

riangle WARNING

Downshifting to a lower gear at high speed causes engine rpm to increase excessively, potentially damaging the engine and it may also cause the rear wheel to skid and cause an accident. Downshifting should be done below the vehicle speeds for each gear shown in the table.

Vehicle speed when shifting

Shifting up	km/h (mph)
1st → 2nd	25 (15)
2nd → 3rd	45 (27)
3rd → 4th	57 (35)
4th → 5th	68 (42)


Shifting down	km/h (mph)
5th → 4th	57 (35)
4th → 3rd	45 (27)
3rd → 2nd	25 (15)
2nd → 1st	20 (12)

Braking


- Close the throttle completely, leaving the clutch engaged (except when shifting gears) so that the engine will help slow down the motorcycle.
- Shift down one gear at a time so that you are in 1st gear when you come to a complete stop.
- When stopping, always apply both brakes at the same time. Normally the front brake should be applied a little more than the rear. Shift down or

- fully disengage the clutch as necessary to keep the engine from stalling.
- Never lock the brakes, or it will cause the tires to skid. When turning a corner, it is better not to brake at all. Reduce your speed before you get into the corner.
- For emergency braking, disregard downshifting, and concentrate on applying the brakes as hard as possible without skidding.
- Even in motorcycles equipped with ABS, braking during cornering may cause wheel slip. When turning a corner, it is better to limit braking to the light application of both brakes or not to brake at all. Reduce your speed before you get into the corner.

96 HOW TO RIDE THE MOTORCYCLE

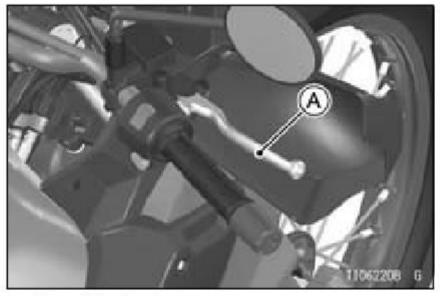

A. Front Brake Lever

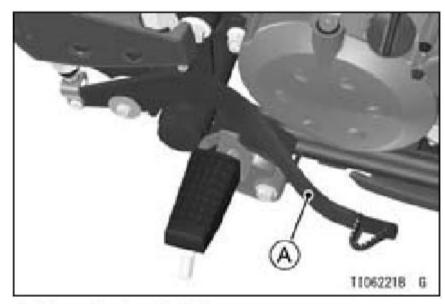

A. Rear Brake Pedal

ABS

(only on ABS model)

ABS is designed to help prevent the wheels from locking up when the brakes are applied hard while running straight. The ABS automatically regulates brake force. Intermittently gaining gripping force and braking force helps prevent wheel lock-up and allows stable steering control while stopping.

Brake control function is identical to that of a conventional motorcycle. The brake lever is used for the front brake and the brake pedal for the rear brake.

Although the ABS provides stability while stopping by preventing wheel lock-up, remember the following characteristics:

- To apply the brake effectively, use the front brake lever and rear brake pedal simultaneously in the same manner as conventional motorcycle brake system.
- ABS cannot compensate for adverse road conditions, misjudgment or improper application of brakes. You must take the same care as with motorcycles not equipped with ABS.
- ABS is not designed to shorten the braking distance. On loose, uneven

or downhill surfaces, the stopping distance of a motorcycle with ABS may be longer than that of an equivalent motorcycle without ABS. Use special caution in such areas.

- ABS will help prevent wheel lock-up when braking in a straight line, but it cannot control wheel slip which may be caused by braking during cornering. When turning a corner, it is better to limit braking to the light application of both brakes or not to brake at all. Reduce your speed before you get into the corner.
- Same as conventional brake system, an excessive sudden braking may cause wheel lock up that makes it harder to control a motorcycle.
- During braking, ABS will not prevent the rear wheel lifting.

riangle WARNING

ABS cannot protect the rider from all possible hazards and is not a substitute for safe riding practices. Be aware of how the ABS system operates and its limitations. It is the rider's responsibility to ride at appropriate speeds and manner for weather, road surface and traffic conditions.

 The computers integrated in the ABS compare vehicle speed with wheel speed. Since non-recommended tires can affect wheel speed, they may confuse the computers, which can extend braking distance.

riangle WARNING

Use of non-recommended tires may cause malfunctioning of ABS and can lead to extended braking distance. The rider could have an accident as a result. Always use recommended standard tires for this motorcycle.

NOTE

- OWhen the ABS is functioning, you may feel a pulsing in the brake lever or pedal. This is normal. You need not suspend applying brakes.
- ○ABS does not function at speeds of approx. 5 km/h (3.1 mph) or below.
- OABS does not function if the battery is discharged. When riding with an insufficiently charged battery, ABS may not function. Keep the battery in good condition according to

the "Battery Maintenance" section in the MAINTENANCE AND ADJUST-MENT chapter.

Stopping the Engine

- Close the throttle completely.
- Shift the transmission into neutral.
- Turn the ignition key to the "OFF" position.
- Support the motorcycle on a firm, level surface with the side stand.
- Lock the steering.

Stopping the Motorcycle in an Emergency

Your Kawasaki Motorcycle has been designed and manufactured to provide you optimum safety and convenience. However, in order to fully benefit from Kawasaki's safety engineering and craftsmanship, it is essential that you, the owner and operator, properly maintain your motorcycle and become thoroughly familiar with its operation. Improper maintenance can create a dangerous situation known as throttle failure. Two of the most common causes of throttle failure are:

- An improperly serviced or clogged air cleaner may allow dirt and dust to enter the throttle body and stick the throttle open.
- 2. During removal of the air cleaner, dirt is allowed to enter and jam the fuel injection system.

In an emergency situation such as throttle failure, your vehicle may be stopped by applying the brakes and disengaging the clutch. Once this stopping procedure is initiated, the engine stop switch may be used to stop the engine. If the engine stop switch is

100 HOW TO RIDE THE MOTORCYCLE

used, turn off the ignition switch after stopping the motorcycle.

Parking

⚠ WARNING

Operating or parking the vehicle near flammable materials can cause a fire, and can result in property damage or severe personal injury.

Do not idle or park your vehicle in an area where tall or dry vegetation, or other flammable materials could come into contact with the muffler or exhaust pipe.

$\hat{m{\Lambda}}$ WARNING

The engine and exhaust system get extremely hot during normal operation and can cause serious burns.

Never touch a hot engine, exhaust pipe, or muffler during operation or after stopping the engine.

- Shift the transmission into neutral and turn the ignition key to the "OFF" position.
- Support the motorcycle on a firm, level surface with the side stand.

NOTICE

Do not park on a soft or steeply inclined surface, or the motorcycle may fall over.

 If parking inside a garage or other structure, be sure it is well ventilated and the motorcycle is not close to any source of flame or sparks; this includes any appliance with a pilot light.



Gasoline is extremely flammable and can be explosive under certain conditions, creating the potential for serious burns. Turn the ignition switch off. Do not smoke. Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

 Lock the steering to help prevent theft.

The maintenance and adjustments outlined in this chapter must be carried out in accordance with the Daily Checks and Periodic Maintenance to keep the motorcycle in good running condition and to reduce air pollution. The initial maintenance is vitally important and must not be neglected.

⚠ WARNING

Failure to perform these checks or to correct a problem before operation may result in serious damage or an accident. Always perform daily checks before operation.

Although items other than daily maintenance are described, this maintenance and repair work should be done by qualified technicians. Kawasaki does not recommend doing this work without knowledge and proper tools. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect or improper adjustment made by the owner.

A DANGER

Exhaust gas contains carbon monoxide, a colorless, odorless poisonous Inhaling carbon monoxide can cause serious brain injury or gas. death. DO NOT run the engine in enclosed areas. Operate only in a well-ventilated area.

NOTE

O If a torque wrench is not available, the maintenance items which require a specific torque value should be serviced by an authorized Kawasaki dealer.

Daily Checks

Check the following items each day before you ride. The time required is minimal, and habitual performance of these checks will help ensure you a safe, reliable ride. If any irregularities are found during these checks, contact an authorized Kawasaki dealer. Temporary measures methods are described on each page.

Operation	See Page
Fuel	
Adequate supply in tank, no leaks	j
Engine oil	
Oil level between level lines	112
Tires	
Air pressure (when cold), install the air valve cap	147
Tire wear	148
Drive chain	
Slack: every 1 000 km (600 mile)	133
Lubricate: every 600 km (400 mile)	132

Operation	See Page
Bolts, nuts and fasteners	
Check for loose and/or missing bolts, nuts and fasteners	-
Steering	
Action smooth but not loose from lock to lock	-
No binding of control cables	
Brakes	
Brake pad wear	138
Brake fluid level	137
No brake fluid leakage	-
Throttle	
Throttle grip free play	126
Clutch	
Clutch lever free play	129
Clutch lever operates smoothly	
Coolant	
No coolant leakage	

Operation	See Page
Coolant level between level lines (when engine is cold)	118
Electrical equipment	
All lights (head, city, brake/tail, turn signal, license plate, warning/indicator) and horn work	_
Engine stop switch	
Stops engine	-
Side stand	
Return to its fully up position by spring tension	1-
Return spring not weak or not damaged	_
Rear view mirrors	
Rear view sight	-

Periodic Maintenance

- *A: Service at number of years shown or indicated odometer reading intervals, whichever comes first.
- *B: For higher odometer readings, repeat at the frequency interval established here.
- *C: Service more frequently when operating in severe conditions: dusty, wet, muddy, high speed, or frequent starting/stopping.
- *D: California model only
- O: Emission Related Item
 - Q: Dealer Inspection
 - Dealer Change or Replace
 - Dealer Lubrication

		year	Odometer Reading (*B) × 1 000 km (× 1 000 mile)					
	Items		1 (0.6)	12 (7.6)	24 (15.2)	36 (22.8)	48 (30.4)	Page
0	Air cleaner element (*C)	ऺ :2		Q	Q	Q	Q	121
0	Idle speed		Q	Q	Q	Q	Q	128
0	Throttle control system (play, smooth return, no drag)	Q :1	Q	Q	Q	Q	Q	126
	Fuel system	Q :1	Q	Q	Q	Q	Q	_
	Fuel hose	ॐ :5						
0	Evaporative emission control system (*D)				Q		Q	-
	Cooling system	Q :1	Q	Q	Q	Q	Q	-
	Coolant, water hose and O-ring	© :3				છ		-
0	Valve clearance				Q		Q	-
0	Air suction system			Q	Q	Q	Q	-

		year (*A)		See				
	Items		1 (0.6)	12 (7.6)	24 (15.2)	36 (22.8)	48 (30.4)	Page
0	Air suction valve			Q	ď	ď	Q	_
	Spark arrester		Q : every 6 000 km (3 800 mile)					131
	Clutch operation (play, engagement, disengagement)	Q :1	Q	σ	σ	σ	σ	129
	Engine oil (*C) and oil filter	ゆ :1	ઈ	G	§	G	ઈ	113
	Balancer chain tension		Q	Q	ď	ď	q	-
	Wheel bearing damage	Q :1		Q	ď	ď	Q	1—8
	Spoke tightness and rim runout		Q	Q : every 6 000 km (3 800 mile)				£—32
	Drive chain wear (*C)			Q	Q	Q	Q	-
	Drive chain guide wear			Q	Q	Q	Q	=

	year (*A)		See				
Items		1 (0.6)	12 (7.6)	24 (15.2)	36 (22.8)	48 (30.4)	Page
Brake system	Q :1	Q	Q	σ	Q	Q	
Brake operation (effectiveness, play, no drag)	Q :1	Q	Q	σ	σ	Q	-
Brake fluid (front and rear)	\$\tau_{:2}			છ		ઈ	300
Brake hose	\$\tag{\mathcal{O}}:4						-
Rubber parts of brake master cylinder and caliper	් :4					Ð.	.
Suspension system	Q :1		Q	Q	Q	Q	100 P
Lubrication of rear suspension				•		1	
Steering play	Q :1	Q	Q	Q	Q	Q	_
Steering stem bearing	1€:2			~		~	
Electrical system	Q :1		Q	Q	Q	Q	- <u>1330</u>

		year		See				
	Items		1 (0.6)	12 (7.6)	24 (15.2)	36 (22.8)	48 (30.4)	Page
0	Spark plug			Ð	ઈ	S.	છ	: - :
	Chassis parts	> :1		*	~	^	~	8—0
	Condition of bolts, nuts and fasteners		Q	Q	Q	Q	Q	5 - 8

NOTE

 All owner daily maintenance items should also be checked at every scheduled dealer service.

Engine Oil


Oil Level Inspection

- If the engine is cold, start the engine and run it for several minutes at idle speed.
- Stop the engine, then wait several minutes until the oil settles.

NOTICE

Racing the engine before the oil reaches every part can cause engine seizure.

 Check the engine oil level through the oil level inspection window. With the motorcycle held level, the oil level should come up between the upper and lower level lines next to the oil level inspection window.

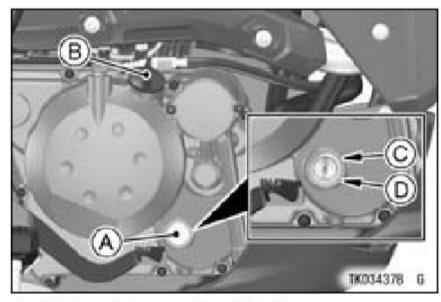


- A. Oil Level Inspection Window
- B. Oil Filler Cap
- C. Upper Level Line
- D. Lower Level Line
- If the oil level is too high, remove the excess oil through the oil filler opening using a syringe or some other suitable device.
- If the oil level is too low, add oil to reach the correct level. Use the same type and brand of oil that is already in the engine.

Oil and/or Oil Filter Change


- Warm up the engine thoroughly, and then stop it.
- Place an oil pan beneath the engine.
- Remove the engine oil drain bolt and gasket.

⚠ WARNING

Engine oil is a toxic substance. Dispose of used oil properly. Contact your local authorities for approved disposal methods or possible recycling.

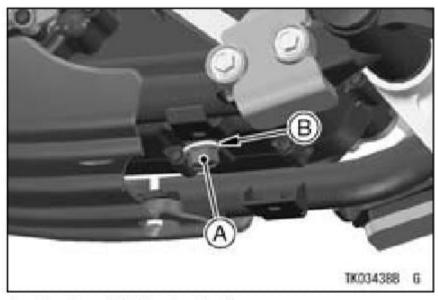


- A. Engine Oil Drain Bolt
- B. Gasket
- Let the oil completely drain with the motorcycle perpendicular to the ground.
- If the oil filter is to be replaced, remove the oil filter cap bolts and oil filter cap with O-ring.

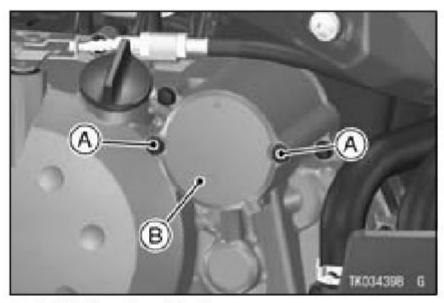

A. Oil Filter Cap Bolts B. Oil Filter Cap

• Remove the oil filter.

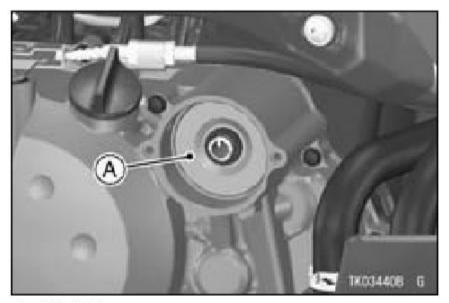


A. Oil Filter

- Remove the bypass valve from the oil filter.
- Replace the oil filter with a new one.

- A. Oil Filter B. Bypass Valve
- Apply engine oil to the grommets of the oil filter.
- Insert the bypass valve into the oil filter.
- Install the oil filter to the collar so that the smaller end of the bypass valve faces inside.


NOTICE

If the bypass valve is the wrong direction, it blocks oil flow and causes an engine seizure.

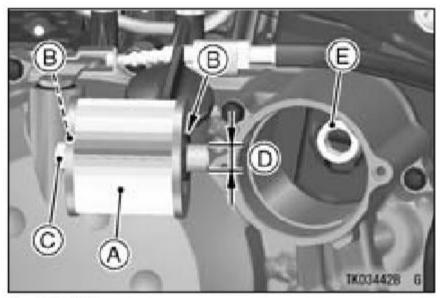

- A. Oil Filter
- **B. Grommets**
- C. Bypass Valve
- D. Smaller End
- E. Collar
- Replace the O-ring of the oil filter cap with a new one.

- Apply grease to the O-ring.
- Install the oil filter cap so that the mark faces upward.

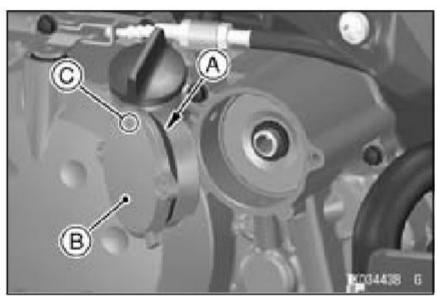

- A. O-ring
- B. Oil Filter Cap
- C. Mark
- Tighten the oil filter cap bolts to the specified torque.

Tightening Torque

Oil Filter Cap Bolts:

8.8 N·m (0.90 kgf·m, 78 in·lb)

- Replace the engine oil drain bolt gasket with a new one.
- Install the engine oil drain bolt with a new gasket. Tighten it to the specified torque.

Tightening Torque

Engine Oil Drain Bolt: 29 N·m (3.0 kgf·m, 21 ft·lb)

NOTE

- Of a torque wrench is not available, this item should be serviced by an authorized Kawasaki dealer.
- Fill the engine up to the upper level line with a good quality engine oil specified in the table.

Recommended Engine Oil

Type: Kawasaki Performance 4-Stroke Motorcycle Oil* Kawasaki Performance 4-Stroke Semi-Synthetic Oil* Kawasaki Performance 4-Stroke Full Synthetic Oil* or other 4-stroke oils with API SG, SH, SJ, SL or SM with JASO MA, MA1 or MA2 rating Viscosity: SAE 10W-40

*Kawasaki Performance Oils and Lubricants have been specifically engineered for your vehicle. Consistent use of these products meets or exceeds warranty and service requirements and can help to extend the life of your Kawasaki.

NOTE

ODo not add any chemical additive to the oil. Oils fulfilling the above requirements are fully formulated and provide adequate lubrication for both the engine and the clutch.

Engine Oil Capacity


1.9 L (2.0 US qt)

[when filter is not removed]

2.0 L (2.1 US qt)

[when filter is removed]

Although 10W-40 engine oil is the recommended oil for most conditions, the oil viscosity may need to be changed to accommodate atmospheric conditions in your riding area.

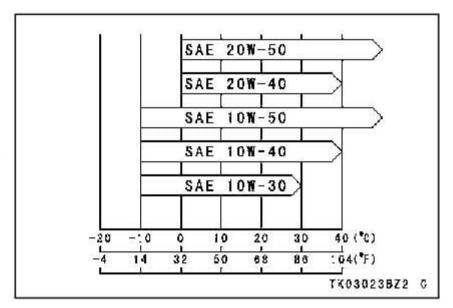


- Start the engine.
- Check the oil level and oil leakage.

Coolant

Coolant Level Inspection

- Position the motorcycle so that it is perpendicular to the ground.
- Check the coolant level through the coolant level gauge on the reserve tank located to the behind of the right lower fairing. The coolant level

should be between the F (Full) and L (Low) level lines.

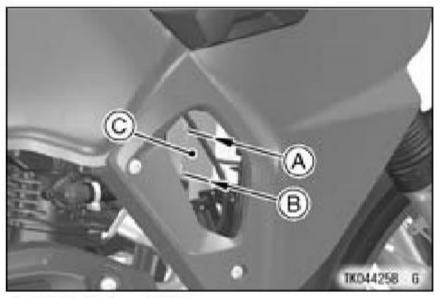


- A. F (Full) Level Line
- B. L (Low) Level Line
- C. Reserve Tank

NOTE

 Check the level when the engine is cold (room or atmospheric temperature). If the amount of coolant is insufficient, add coolant into the reserve tank.

Coolant Filling


- Remove the quick rivet and screws.
- Remove the inner cover bolts and right inner cover.

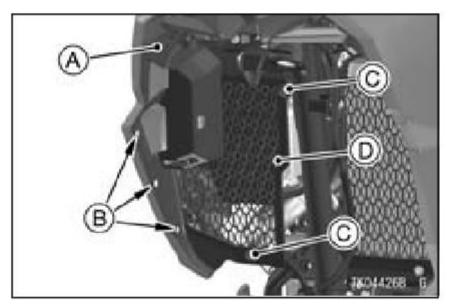

- A. Quick Rivet
- B. Screws
- C. Inner Cover Bolts
- D. Right Inner Cover

MAINTENANCE AND ADJUSTMENT 119

 Remove the cap from the reserve tank and add coolant through the filler opening between the F (Full) and L (Low) level lines.

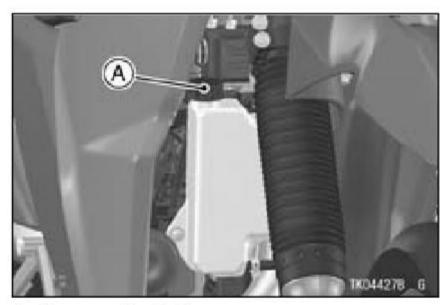

A. Reserve Tank Cap

NOTE

OIn an emergency you can add water alone to the coolant reserve tank, however it must be returned to the correct mixture ratio by the addition

of antifreeze concentrate as soon as possible.

NOTICE

If coolant must be added often, or the reserve tank completely runs dry, there is probably leakage in the system. Have the cooling system inspected by your authorized Kawasaki dealer.

- Install the reserve tank cap.
- Install the right inner cover.
- Tighten the inner cover bolts to the specified torque.

Tightening Torque

Inner Cover Bolts:

9.8 N·m (1.0 kgf·m, 87 in·lb)

NOTE

- Of a torque wrench is not available, this item should be serviced by an authorized Kawasaki dealer.
- Install the screws and quick rivet.

Coolant Change

Have the coolant changed by an authorized Kawasaki dealer.

Coolant Requirement

MARNING

Coolant containing corrosion inhibitors for aluminum engines and radiators include harmful chemicals for human body. Drinking coolant can result in serious injury or death. Use coolant in accordance with the instructions of the manufacturer. Use a permanent type of antifreeze (soft water and ethylene glycol plus corrosion and rust inhibitor chemicals for aluminum engines and radiators) in the cooling system. On the mixture ratio of coolant, choose the suitable one referring to the relation between freezing point and strength directed on the container.

NOTICE

If hard water is used in the system, it causes scale accumulation in the water passages, and considerably reduces the efficiency of the cooling system.

NOTE

○ A permanent type of antifreeze is installed in the cooling system when shipped. It is mixed at 50% and has the freezing point of –35°C (–31°F).

Air Cleaner

Air Cleaner Element Removal


- Remove the bolt and washer.
- Remove the bolts and collars.



- A. Bolt and Washer B. Bolts and Collars
- Clear the tab and hook of the right side cover from the seat cover.

NOTE

- OBe careful that the side cover does not touch the saddlebag stay.
- Remove the right side cover.

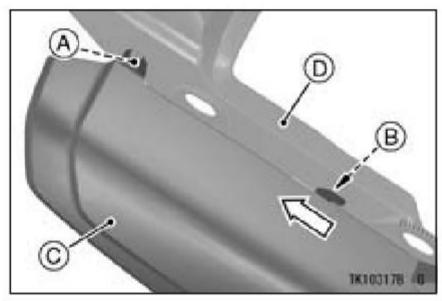


- A. Tab
- B. Hook
- C. Right Side Cover
- D. Seat Cover

 Remove the air cleaner cap screw and air cleaner cap.




- A. Air Cleaner Cap Screw
- B. Air Cleaner Cap
- Remove the wing bolt.
- Remove the air cleaner element from the air cleaner housing.

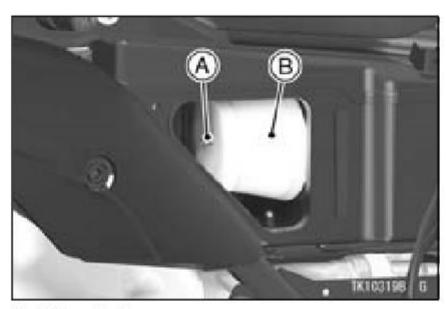

A. Wing Bolt B. Air Cleaner Element

 Remove the air cleaner element from the element frame.

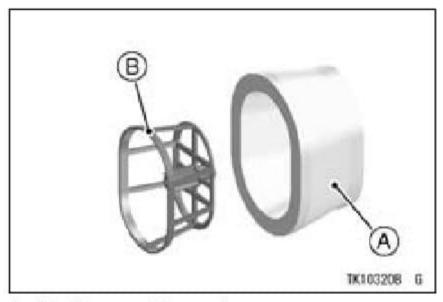

A. Air Cleaner Element B. Element Frame

- Put a clean, lint-free towel into the air cleaner housing to keep dirt or other foreign material from entering.
- Inspect the element material for damage. If any part of the element is damaged, the element must be replaced.

⚠ WARNING

If dirt or dust is allowed to pass through into the throttle body assembly, the throttle may become stuck, possibly causing accident. Be sure to keep the dust from entering during cleaning.

NOTICE

If dirt gets through into the engine, excessive engine wear and possibly engine damage will occur.

Air Cleaner Element Cleaning

- Clean the element in a bath of a high flash-point solvent.
- Squeeze it dry in a clean towel. Do not wring the element or blow it dry; the element can be damaged.

- Check the element for visible damage.
- If element is damaged, replace it.
- After cleaning, saturate the element with a high-quality foam-air-filter oil, squeeze out the excess oil, then wrap it in a clean towel and squeeze it as dry as possible. Be careful not to tear the element.

⚠ WARNING

Gasoline and low flash-point solvents are extremely flammable and may explode, causing severe burns. Do not use gasoline or a low flash-point solvent to clean the element. Clean the element in a well-ventilated area. Be sure there are no sparks or flame in the work area, including any appliance with a pilot light.

Air Cleaner Element Installation

- Install the air cleaner element to the element frame.
- Install the air cleaner element to the air cleaner housing.
- Tighten the wing bolt.
- Install the air cleaner cap.
- Tighten the air cleaner cap screw to the specified torque.


Tightening Torque

Air Cleaner Cap Screw:

2.5 N·m (0.25 kgf·m, 22 in·lb)

NOTE


- Of a torque wrench is not available, this item should be serviced by an authorized Kawasaki dealer.
- Insert the tab between the seat cover and rear fender.
- Insert the hook into the slot.

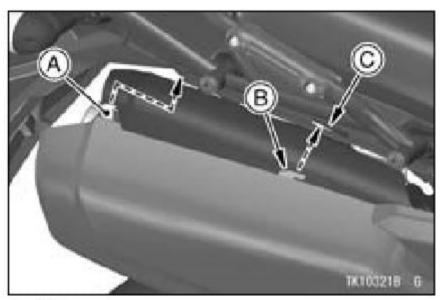

- A. Tab
- B. Hook
- C. Slot
- Tighten the bolts with collars.
- Tighten the bolt with washer.

Oil Draining

 Inspect the transparent drain hose located the left lower end of the air cleaner housing to see if any oil has run down.

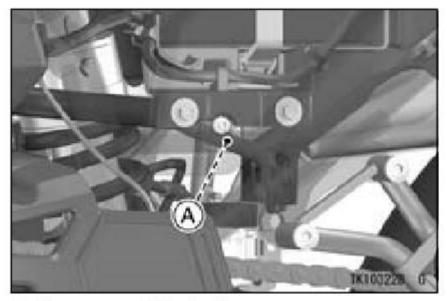

A. Transparent Drain Hose

 If there is any oil in the drain hose, remove the plug from the lower end of the drain hose, and drain the oil.

MARNING


Oil on tires will make them slippery and can cause an accident and injury. Be sure to install the plug in the drain hose after draining.

Throttle Control System

Throttle Grip

Throttle Grip Free Play Inspection

- Check that the throttle grip moves smoothly from full open to close, and the throttle closes quickly and completely by the return spring in all steering positions.
- If the throttle grip does not return properly, have the throttle control system checked by an authorized Kawasaki dealer.
- Check the throttle grip free play by turning back and forth.

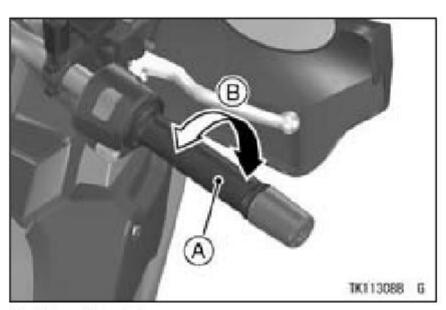

A. Throttle Grip

B. Throttle Grip Free Play

Throttle Grip Free Play

 $2 \sim 3 \text{ mm} (0.08 \sim 0.12 \text{ in.})$


If there is improper play, adjust it.

Throttle Grip Free Play Adjustment

- Loosen the locknuts at the upper end of the throttle cables.
- Turn both throttle cable adjuster to give the throttle grip plenty of play.

MAINTENANCE AND ADJUSTMENT 127

- Turn the decelerator cable adjuster until there is no play when the throttle grip is completely closed.
- Tighten the locknut.
- Turn the accelerator cable adjuster until of 2 ~ 3 mm (0.08 ~ 0.12 in.) of throttle grip play is obtained.
- Tighten the locknut.

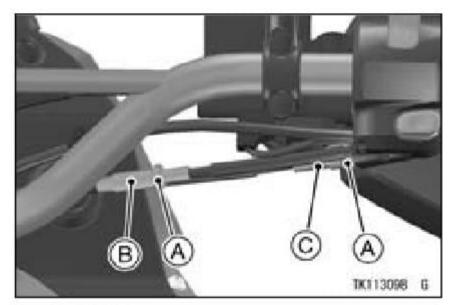

- A. Locknuts
- B. Decelerator Cable Adjuster
- C. Accelerator Cable Adjuster

 With the engine idling, turn the handlebars to each side. If handlebars movement changes the idle speed, the throttle cables may be improperly adjusted or incorrectly routed, or they may be damaged. Be sure to correct any of these conditions before idling.

A WARNING

Operation with improperly adjusted, incorrectly routed, or damaged cables could result in an unsafe riding condition. Be sure the control cables are adjusted and routed correctly, and are free from damage.

Idle Speed

The idle speed inspection should be performed in accordance with the Periodic Maintenance chart.

This motorcycle is equipped with the Idle Speed Control System. If the idle speed is disturbed, inspection of the idle speed control should be done by an authorized Kawasaki dealer.

NOTE

 While the engine is cold, the fast idle system automatically raises the engine idle speed.

Idle Speed

1 500 ±50 r/min (rpm)


Clutch

Clutch Operation Inspection

- Check that the clutch lever operates properly and that the inner cable slides smoothly. If there is any irregularity, have the clutch cable checked by an authorized Kawasaki dealer.
- Check the clutch lever free play.

Clutch Lever Free Play

8 ~ 12 mm (0.31 ~ 0.47 in.)

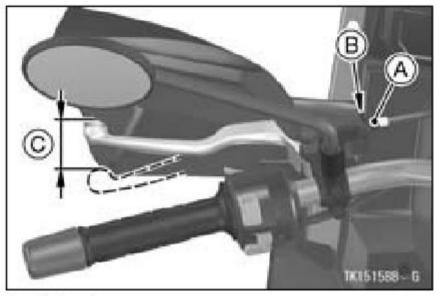

- A. Adjuster
- B. Locknut
- C. Clutch Lever Free Play
- If the free play is incorrect, adjust the clutch lever free play as follows.

Clutch Lever Free Play Adjustment

 Loosen the locknut, and turn the adjuster so that the clutch lever will have the specified free play.

M WARNING

Excess clutch lever free play could prevent clutch disengagement and cause a crash resulting in serious injury or death. When adjusting the clutch lever free play, be sure the upper end of the clutch outer cable is fully seated in its fitting so that it doesn't slip into place later and create excessive free play.

 If it cannot be done, have the clutch cable adjusted by an authorized Kawasaki dealer.

NOTE

O After the adjustment is made, start the engine and check that the clutch

does not slip and that it releases properly.

Spark Arrester

This motorcycle is equipped with a spark arrester approved for off-road use by the U.S. Forest Service. It must be properly maintained to ensure its efficiency.

In accordance with the Periodic Maintenance Chart, clean the spark arrester.

NOTICE


The spark arrester must be installed correctly and functioning properly to provide adequate fire protection.

Spark Arrester Cleaning


⚠ WARNING

Hot exhaust system parts can cause serious burns. The exhaust system becomes very hot soon after the engine is started. To avoid burns, be sure the exhaust system is cold before cleaning the spark arrester.

 Remove the spark arrester bolts and spark arrester.

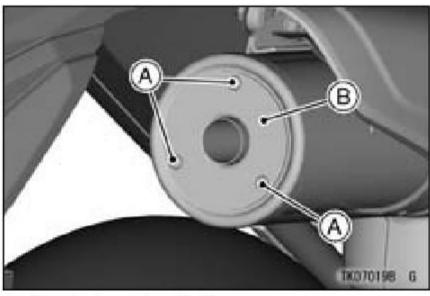

- A. Spark Arrester Bolts
- B. Spark Arrester
- With a wire brush, remove the carbon off the inside of the spark arrester and muffler.
- Replace the gasket with a new one.

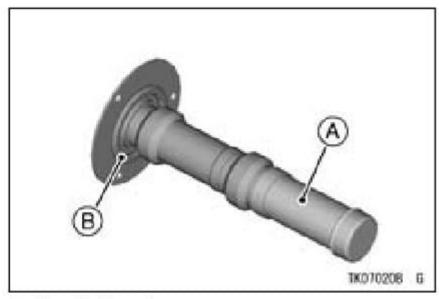

A. Spark Arrester

B. Gasket

- Install the spark arrester into the rear end of the muffler.
- Tighten the spark arrester bolts to the specified torque.

Tightening Torque

Spark Arrester Bolts:

8.0 N·m (0.82 kgf·m, 71 in·lb)

NOTE

Of a torque wrench is not available, this item should be serviced by an authorized Kawasaki dealer.


Drive Chain

Drive Chain Lubrication

Lubrication is necessary after riding through rain or on wet roads, or any time that the chain appears dry.

Use a lubricant for sealed chains to prevent deterioration of chain seals. If the chain is especially dirty, clean it using a cleaner for sealed chains following the instructions supplied by the chain cleaner manufacturer.

 Apply lubricant to the sides of the rollers so that it will penetrate to the rollers and bushings. Apply lubricant to the seals so that the seals will be coated with lubricant. Wipe off any excess lubricant.

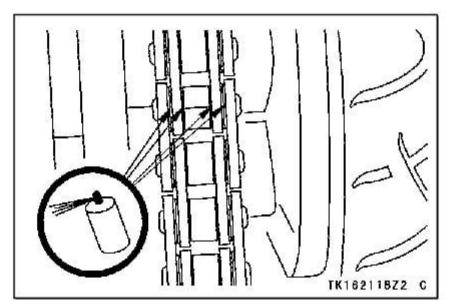


 Wipe off any lubricant that gets on the tire surface.

Drive Chain Slack Inspection

- Set the motorcycle up on its side stand.
- Clean the chain if it is dirty, and lubricate it if it appears dry.
- Rotate the rear wheel to find the position where the chain is tightest, and

measure the maximum chain slack by pulling up and pushing down the chain midway between the engine sprocket and rear wheel sprocket.

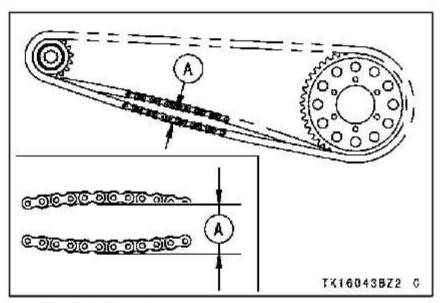

A. Chain Slack


 If the drive chain is too tight or too loose, adjust it so that the chain slack is within the standard value.

Drive Chain Slack

Standard: 30 ~ 40 mm (1.2 ~ 1.6 in.)


Drive Chain Slack Adjustment

- Loosen the left and right chain adjuster locknuts.
- Remove the cotter pin, and loosen the axle nut.

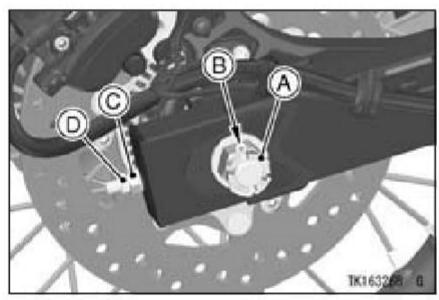

- A. Axle Nut
- B. Cotter Pin
- C. Adjuster
- D. Locknut

- If the chain is too loose, turn in the left and right chain adjusters evenly.
- If the chain is too tight, turn out the left and right chain adjusters evenly.
- Turn both chain adjusters evenly until the drive chain has the correct amount of slack. To keep the chain and wheel properly aligned, the left wheel alignment indicator should align with the same swingarm mark that the right wheel alignment indicator aligns with.

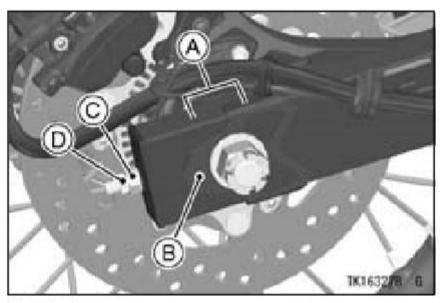

- A. Marks
- B. Wheel Alignment Indicator
- C. Adjuster
- D. Locknut

NOTE

○ Wheel alignment can also checked using the straightedge or string method.

⚠ WARNING

Misalignment of the wheel will result in abnormal wear, and may result in an unsafe riding condition. Align the rear wheel using the marks on the swingarm or measuring the distance between the center of the axle and swingarm pivot.

- Tighten both chain adjuster locknuts.
- Tighten the axle nut to the specified torque.

Tightening Torque


Axle Nut:

108 N·m (11.0 kgf·m, 79.7 ft·lb)

NOTE

Olf a torque wrench is not available, this item should be serviced by an authorized Kawasaki dealer.

- Rotate the wheel, measure the chain slack again at the tightest position, and readjust if necessary.
- Install a new cotter pin through the axle nut and axle, and spread its ends.

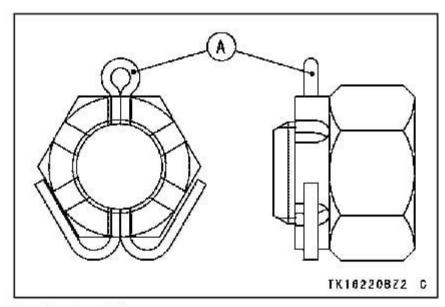


A. Cotter Pin

NOTE

 When inserting the cotter pin, if the slots in the nut do not align with

- the cotter pin hole in the axle shaft, tighten the nut clockwise up to the next alignment.
- OIt should be within 30 degrees.
- O Loosen once and tighten again when the slot goes past the nearest hole.

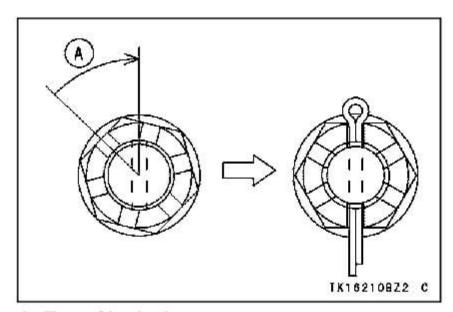

A. Turn Clockwise

⚠ WARNING

A loose axle nut can lead to an accident resulting in serious injury or death. Tighten the axle nut to the proper torque and install a new cotter pin.

 Check the rear brake (see Brakes) section).

Brakes


If you feel there is something wrong when applying the brakes, have the brake system checked by an authorized Kawasaki dealer immediately.

⚠ WARNING

Air in the brake lines diminish braking performance and can cause an accident resulting in injury or death. If the brake lever or pedal feels mushy when it is applied, there might be air in the brake lines or the brake may be defective. Have the brake checked immediately by an authorized Kawasaki dealer.


Brake Fluid Level Inspection

 With the front brake fluid reservoir. held horizontal, the brake fluid level must be above the lower level line.

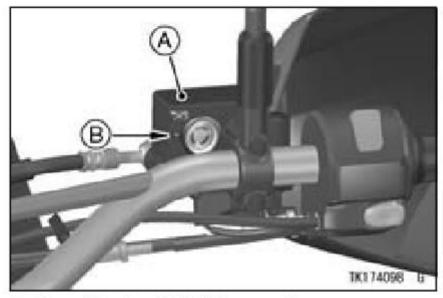

A. Front Brake Fluid Reservoir
B. Lower Level Line

 With the rear brake fluid reservoir held horizontal, the brake fluid level must be kept between the upper and lower level lines.

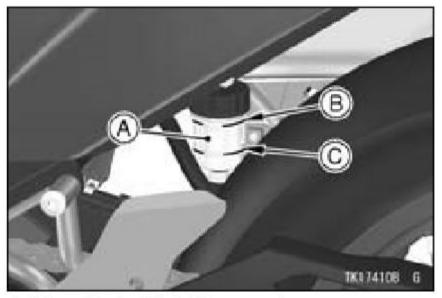

A. Rear Brake Fluid Reservoir

- B. Upper Level Line
- C. Lower Level Line
- If the fluid level is lower than the lower level line it may indicate that the fluid is leaking. In this case, have the brake system inspected by an authorized Kawasaki dealer.


Brake Pad Wear Inspection

Inspect the brakes for wear. For each front and rear disc brake caliper, if the


thickness of either pad lining is less than below table, replace both pads in the caliper as a set. Pad replacement should be done by an authorized Kawasaki dealer

Lining Thickness Service Limit

Front	1.0 mm (0.04 in.)
Rear	1.0 mm (0.04 in.)

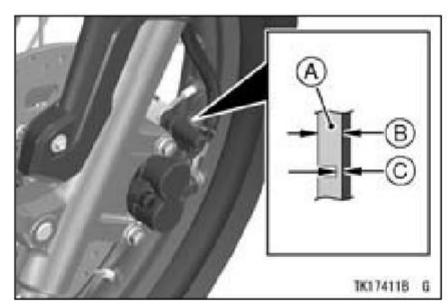

- A. Front Brake Pads B. Lining Thickness
- C. Service Limit

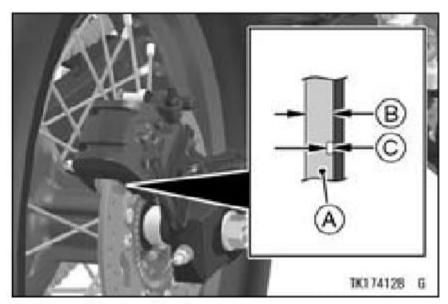


- A. Rear Brake Pads
- **B. Lining Thickness**
- C. Service Limit

Brake Light Switches

Brake Light Switch Inspection

- Turn the ignition switch on.
- The brake light should go on when the front brake is applied.

- If it does not, ask your authorized Kawasaki dealer to inspect the front brake light switch.
- Check the operation of the rear brake light switch by depressing the brake pedal. The brake light should go on after the proper pedal travel.

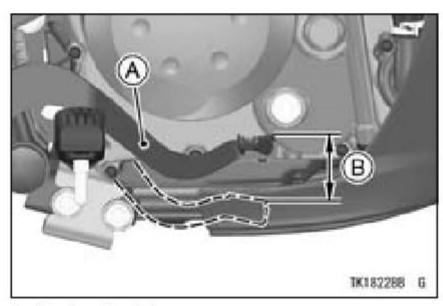


- A. Brake Pedal B. 10 mm (0.39 in.)
- If the light does not come on, adjust the rear brake light switch.

Brake Pedal Travel


10 mm (0.39 in.)

Brake Light Switch Adjustment

Remove the bolts, cover and collars.

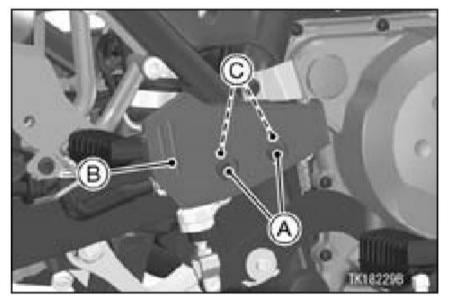

- A. Bolts
- B. Cover
- C. Collars
- To adjust the rear brake light switch, move the switch up or down by turning the adjusting nut.

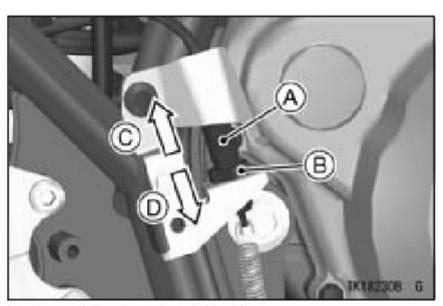


- A. Rear Brake Light Switch
- **B. Adjusting Nut**
- C. Lights sooner
- D. Lights later

NOTICE

To avoid damaging the electrical connections inside the switch, be sure that the switch body does not turn during adjustment.

MAINTENANCE AND ADJUSTMENT 141

- Install the collars and cover.
- Tighten the bolts.

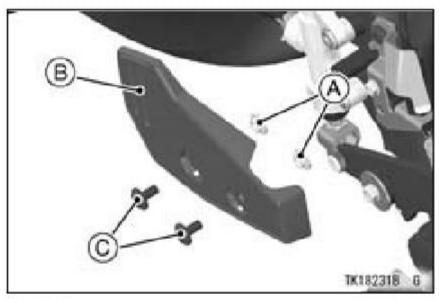

- A. Collars
- B. Cover
- C. Bolts

Suspension System

Front Fork

NOTICE

After riding on the normal road, the unpaved road and in the rainy weather, clean off any dirt (grit, mud or insect etc.) that stuck to inner tube before it hardens. If the motorcycle keeps running with the dirt stuck to the inner tube, the oil seal will be damaged and it causes the oil leak.

Rear Shock Absorber

Spring Preload Adjustment

The spring preload adjuster on the rear shock absorber has 5 positions.


Standard

2nd position

- In accordance with the setting table, turn the adjusting bolt.
- Turn the adjusting bolt clockwise to increase spring preload.
- Turn the adjusting bolt counterclockwise to decrease spring preload.

NOTICE

When the spring preload adjuster is at the position of the 1st or 5th, do not turn the adjusting bolt in opposite direction of the above procedures. The spring preload adjuster will be damaged by the shock.

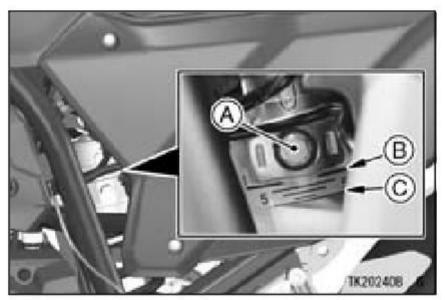

A. Adjusting Bolt B. 1st Position

C. 5th Position

Rebound Damping Force Adjustment

The adjuster is located at the lower end of the rear shock absorber.

Standard


3/4 turns out

Out from the fully seated position (turned fully clockwise).

- Turn the adjuster clockwise with a flat tip screwdriver to increase damping force.
- Turn the adjuster counterclockwise to decrease damping force.

NOTICE

Do not turn the adjuster beyond the fully seated position or the adjusting mechanism may be damaged.

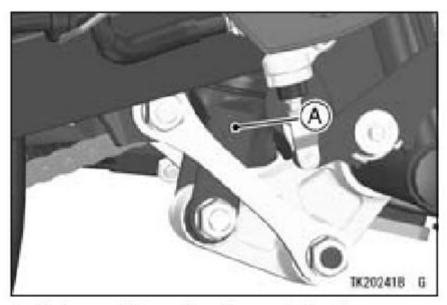

A. Rebound Damping Force Adjuster

Setting Table

Rear Shock Absorber Spring Preload Setting

	Softest setting limit	Standard	Hardest setting limit
Adjuster Position	1st	2nd	5th
Spring Action	Weak	←→	Strong
Setting	Soft	←→	Hard
Load	Light	←→	Heavy
Road	Good	←→	Bad
Speed	Low	\longleftrightarrow	High

Rear Shock Absorber Damping Force Settings

		Softest setting limit	Standard	Hardest setting limit
Adjuster Position:	Rebound	3 turns out**	3/4 turns out**	0*
Damping Force		Weak	←→	Strong
Setting		Soft	←→	Hard
Load		Light	←→	Heavy
Road		Good	←→	Bad
Speed		Low	\longleftrightarrow	High

^{*:} This position is the fully seated position (turned fully clockwise).

^{**:} Out from the fully seated position (turned fully clockwise). This adjustment range may not exactly match the number shown in the table due to small tolerance of production.


Wheels

Tire Pressure Inspection

- Remove the air valve cap.
- Check the tire pressure often, using an accurate gauge.
- Make sure to install the air valve cap securely.

NOTE

- OMeasure the tire pressure when the tires are cold (that is, when the motorcycle has not been ridden more than 1.6 km (1 mile) during the past 3 hours).
- O Tire pressure is affected by changes in ambient temperature and altitude, and so the tire pressure should be checked and adjusted when your riding involves wide variations in temperature or altitude.

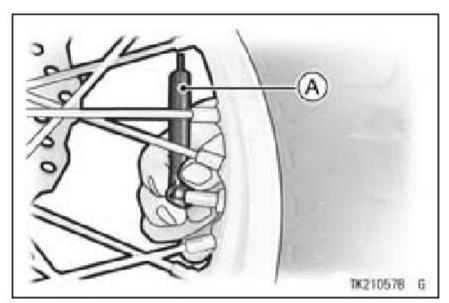

A. Tire Pressure Gauge

Tire Air Pressure (when cold)


Front	Up to 182 kg (401 lb) Load	150 kPa (1.5 kgf/cm², 21 psi)
	Up to 97.5 kg (215 lb) Load	150 kPa (1.5 kgf/cm², 21 psi)
Rear	97.5 ~ 182 kg (215 ~ 401 lb) Load	250 kPa (2.5 kgf/cm², 36 psi)

Tire Wear, Damage

As the tire tread wears down, the tire becomes more susceptible to puncture and failure. An accepted estimate is that 90% of all tire failures occur during the last 10% of tread life (90% worn). So it is false economy and unsafe to use the tires until they are bald.

Tire Wear Inspection

 Measure the depth of the tread with a depth gauge, and replace any tire that has worn down to the minimum allowable tread depth.

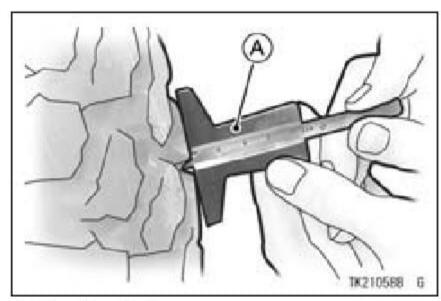

A. Tire Depth Gauge

Minimum Tread Depth

Front		2 mm (0.08 in.)
Door	Up to130 km/h (80 mph)	2 mm (0.08 in.)
Rear	Over 130 km/h (80 mph)	3 mm (0.12 in.)

 Visually inspect the tire for cracks and cuts, replacing the tire in case of bad damage. Swelling or high spots

- indicate internal damage, requiring tire replacement.
- Remove any imbedded stones or other foreign particles from the tread.

NOTE

O Have the wheel balance inspected whenever a new tire is installed.



Tires that have been punctured and repaired do not have the same capabilities as undamaged tires and can suddenly fail, causing an accident resulting in serious injury or death. Replace damaged tires as soon as possible. To ensure safe handling and stability, use only the recommended standard tires for replacement, inflated to the standard pressure. If it is necessary to ride on a repaired tire, do not exceed 100 km/h (60 mph) until the tire is replaced.

NOTE

 When operating on public roadways, keep maximum speed under traffic law limits.

Standard Tire (Tube-type)

Front	Make, Type: DUNLOP, K750 Size: 90/90-21M/C 54S
Rear	Make, Type: DUNLOP, K750 Size: 130/80-17M/C 65S

⚠ WARNING

Mixing tire brands and types can adversely affect handling and cause an accident resulting in injury or death. Always use the same manufacturer's tires on both front and rear wheels.

$\hat{m{\Lambda}}$ WARNING

New tires are slippery and may cause loss of control and injury. A break-in period of 160 km (100 miles) is necessary to establish normal tire traction. During break-in, avoid sudden and maximum braking and acceleration, and hard cornering.

Battery

The battery installed in this motorcycle is a sealed type, so it is not necessary to check the battery electrolyte level or add distilled water.

NOTICE

Never remove the sealing strip, or the battery can be damaged. Do not install a conventional battery in this motorcycle, or the electrical system cannot work properly.

Make	Siam Furukawa
Туре	FTX9-BS

Battery Maintenance

It is the owner's responsibility to keep the battery fully charged. Failure to do so can lead to battery failure and leave you stranded.

If you are riding your vehicle infrequently, inspect the battery voltage weekly using a voltmeter. If it drops below 12.6 volts, the battery should be charged using an appropriate charger (check with your Kawasaki dealer).

If you will not be using the motorcycle for longer than two weeks, the battery should be charged using an appropriate charger. Do not use an automotive-type quick charger that may overcharge the battery and damage it.

NOTE

O Leaving the battery connected causes the electrical components (clock etc.) to make the battery discharged, resulting the over discharge of the battery. In this case, the repair or replacement of the battery is not included in the warranty. If you do not drive for four weeks or more, disconnect the battery from the vehicle.

Kawasaki-recommended chargers are:

Battery Mate 150-9 OptiMate 4 Yuasa MB-2040/2060 Christie C10122S

If the above chargers are not available, use equivalent one.

For more details, ask your Kawasaki dealer.

Battery Charging

- Charge the battery following the instructions of your battery charger.
- The charger will keep the battery fully charged until you are ready to reinstall the battery in the motorcycle (see Battery Installation).

A DANGER

- Battery acid generates hydrogen gas which is flammable and explosive under certain conditions. It is present within a battery at all times, even in a discharged condition. Keep all flames and sparks (cigarettes) away from the battery.
- Wear eye protection when working with a battery. In the event of battery acid contact with skin, eyes, or clothing, wash the affected areas immediately with water for at least five minutes. Seek medical attention.

⚠ WARNING

Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.

Battery Removal


- Make sure the ignition switch is turned off.
- Remove the bolts and washers.
- Remove the bolts and collars.



- A. Bolts and Washers
- B. Bolts and Collars
- Pull the left side cover outward to clear the projection.
- Pull the left side cover rearward to clear the tab.


NOTE

- OBe careful that the side cover does not touch the saddlebag stay.
- Remove the left side cover.

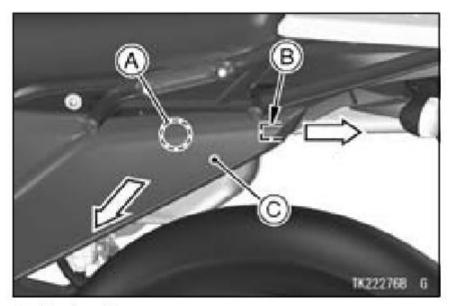

A. Projection

- B. Tab
- C. Left Side Cover
- Disconnect the negative (–) cable from the (–) terminal.
- Slide the red cap from the positive (+) terminal.
- Disconnect the positive (+) cable from the (+) terminal.
- Remove the band.

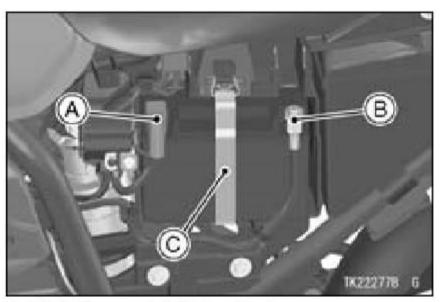

A. Red Cap and (+) Terminal

- B. (-) Terminal
- C. Band
- Take the battery out of the battery case.
- Clean the battery using a solution of baking soda and water. Be sure that the cable connections are clean.

Battery Installation


Place the battery on the battery case.

 Connect the positive (+) cable to the (+) terminal, and then connect the negative (-) cable to the (-) terminal.

NOTICE

Installing the negative (-) cable to the (+) terminal of the battery or the positive (+) cable to the (-) terminal of the battery can seriously damage the electrical system.

- Put a light coat of grease on the terminals to prevent corrosion.
- Cover the (+) terminal with the red cap.
- Install the band.
- Insert the tab into the slot.
- Insert the projection into the grommet.

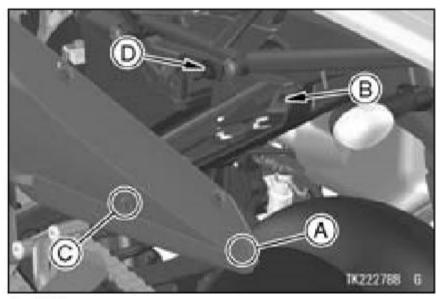

- A. Tab
- B. Slot
- C. Projection
- D. Grommet
- Tighten the bolts with collars.
- Tighten the bolts with washers.


Headlight

Headlight aiming should be done by an authorized Kawasaki dealer.

Horizontal Adjustment

The headlight beam is adjustable horizontally. If not properly adjusted horizontally, the beam will point to one side rather than straight ahead.

 Turn the horizontal adjuster in or out until the beam points straight ahead.

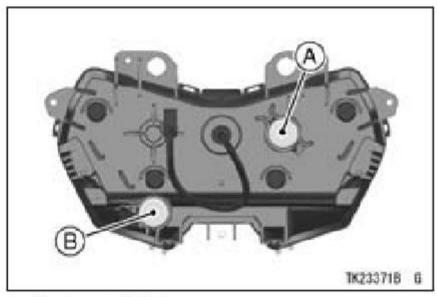

A. Horizontal Adjuster B. Vertical Adjuster

Vertical Adjustment

The headlight beam is adjustable vertically. If adjusted too low, neither low nor high beam will illuminate the road far enough ahead. If adjusted too high, the high beam will fail to illuminate the road close ahead, and the low beam will blind oncoming drivers.

 Turn the vertical adjuster in or out to adjust the headlight vertically.

NOTE

On high beam, the brightest points should be slightly below horizontal. The proper angle is 0.4 degrees below horizontal. This is a 50 mm (2.0 in.) drop at 7.6 m (25 ft) measured from the center of the headlight, with the motorcycle on its wheels and the rider seated.

(D) (B) (IX233728 G

- A. 50 mm (2.0 in.)
- B. Center of Brightest Spot
- C. 7.6 m (25 ft)
- D. Height of Headlight Center

Fuses


Fuses are arranged in the fuse boxes located under the seat. The main fuse is located behind the left side cover. If a fuse fails during operation, inspect the electrical system to determine the

MAINTENANCE AND ADJUSTMENT 157

cause, and then replace it with a new fuse of proper amperage.

If the fuse fails repeatedly, there is something wrong with the electrical system. Have the motorcycle checked by an authorized Kawasaki dealer.


The main fuse removal should be done by an authorized Kawasaki dealer.

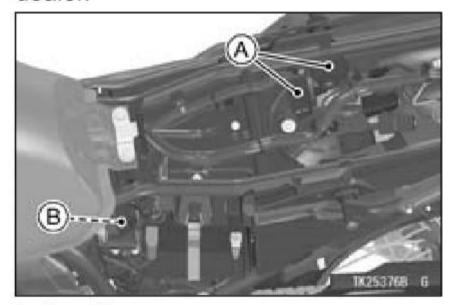

A. Fuse Boxes B. Main Fuse

MARNING

Substituting fuses can cause wiring to overheat, catch fire and/or fail. Do not use any substitute for the standard fuse. Replace the blown fuse with a new one of the correct capacity, as specified on the fuse boxes and main fuse.

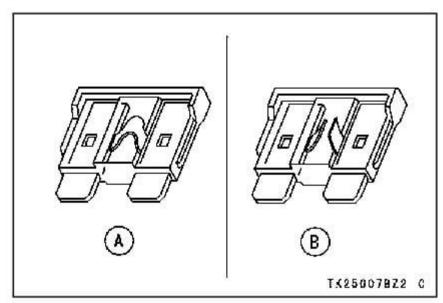

A. Normal B. Failed

General Lubrication

Lubricate the points shown below, with either engine oil or regular grease, in accordance with the Periodic Maintenance Chart or whenever the vehicle has been operated under wet or rainy conditions.

Before lubricating each part, clean off any rusty spots with rust remover and wipe off any grease, oil, dirt, or grime.

Apply motor oil to the following pivots

- Side Stand
- Clutch Lever
- Front Brake Lever
- Rear Brake Pedal

Lubricate the following cables with a pressure cable luber

- (K) Clutch Inner Cable
- (K) Throttle Inner Cables

Apply grease to the following points

- (K) Clutch Inner Cable Upper End
- (K) Throttle Inner Cable Upper Ends

(K): Should be serviced by an authorized Kawasaki dealer.

NOTE

After connecting the cables, adjust them.

Cleaning

General Precautions

Frequent and proper care of your vehicle will enhance its appearance, optimize overall performance, and extend its useful life. Covering your vehicle with a high quality, breathable vehicle cover will help protect its finish from harmful UV rays, pollutants, and reduce the amount of dust reaching its surfaces.

MARNING

Build-up of debris or flammable material in and around the vehicle chassis, engine, and exhaust can cause mechanical problems and increase the risk of fire. When operating the vehicle in conditions that allow debris or flammable material to collect in and around the vehicle, inspect the engine, electrical component and exhaust areas frequently. If debris or flammable materials have collected, park the vehicle outside and stop the engine. Allow the engine to cool, then remove any collected debris. Do not park or store the vehicle in an enclosed space prior to inspecting for build-up of debris or flammable materials.

- Be sure the engine and exhaust are cool before washing.
- When washing the vehicle, always use a mild neutral detergent and water.
- Avoid applying all harsh chemicals, solvents, degreaser, oil remover, electrical contact cleaner, and household cleaning products such as ammonia-based window cleaners. They will damage or deteriorate painted parts, plastic parts, rubber parts and other synthetic parts including covers and headlight lens.
- Avoid applying degreaser to seals, brake pads, and tires.
- Gasoline, brake fluid, and coolant will damage the finish of painted and plastic surfaces: wash them off immediately.
- Avoid wire brushes, steel wool, and all other abrasive pads or brushes.

 Take care when washing the headlight lens and other plastic parts as they can easily be scratched.

NOTE

- OAfter riding in an area where the roads are salted or near the ocean, immediately wash your vehicle with cold water. Do not use warm water as it accelerates the chemical reaction of the salt. After drying, apply a corrosion protection spray on all metal and chrome surfaces to prevent corrosion.
- O Condensation may form on the inside of the headlight lens after riding in the rain, washing the vehicle or humid weather. To remove the moisture, start the engine and turn on the headlight. Gradually the condensation on the inside of the lens will clear off.

Radiator

Clean off any obstructions with a stream of low-pressure water.

NOTICE

Using high-pressure water, as from a car wash facility, could damage the radiator fins and impair the radiator's effectiveness. Do not obstruct or deflect airflow through the radiator by installing unauthorized accessories in front of the radiator or behind the cooling fan. Interference with the radiator airflow can lead to overheating and consequent engine damage.

Matte Paint Parts

 When washing the vehicle, always use a mild neutral detergent and water, or cleaners for matte paint.

- The matte paint effect may be lost when the paint is excessively rubbed.
- If any doubt, consult an authorized Kawasaki dealer.

Plastic Parts

After washing, use a soft cloth to gently dry plastic parts. When dry, treat the headlight lens and other non-painted plastic parts with an approved plastic cleaner/polisher product.

NOTICE

Plastic parts may deteriorate and break if they come in contact with chemical substances or household cleaning products such as gasoline, brake fluid, window cleaners, thread-locking agents, or other harsh chemicals. If a plastic part comes in contact with any harsh chemical substance, wash it off immediately with water and a mild neutral detergent, and then inspect for damage. Avoid using abrasive pads or brushes to clean plastic parts, as they will damage the part's finish.

Chrome and Aluminum

Chrome and uncoated aluminum parts can be treated with a chrome/aluminum polish. Coated aluminum

should be washed with a mild neutral detergent and finished with a spray polish. Aluminum wheels, both painted and unpainted can be cleaned with special non-acid based wheel spray cleaners.

Leather, Vinyl, and Rubber

If your vehicle has leather accessories, special care must be taken. Use a leather cleaner/treatment to clean and care for leather accessories. Washing leather parts with detergent and water will damage them, shortening their life.

Vinyl parts should be washed with the rest of the vehicle, then treated with a vinyl treatment.

The sidewalls of tires and other rubber components should be treated with a rubber protectant to help prolong their useful life.

Where to be Careful

Avoid spraying water with any great force near the following places.

- Disc brake master cylinder and caliper.
- Under the seat and behind the left side cover - if water gets into the fuse box or battery, it can ground out the spark. When this happens the vehicle will not operate properly and the affected parts must be wiped dry.

NOTICE

Coin operated, high pressure spray washers are not recommended. Water may be forced into bearings and other components causing eventual failure from rust and corrosion. Some soaps are highly alkaline and may leave a residue or cause spotting.

NOTE

 Abrasive cleanser or high pressure washer will damage the surface finish on the bodywork.

Washing Your Vehicle

 Before washing, precautions must be taken to keep water off the following parts. Muffler rear opening - cover with a plastic bag.

Ignition switch - cover the keyhole with tape.

- Rinse your vehicle with cold water from a garden hose to remove any loose dirt.
- Mix a mild neutral detergent (designed for motorcycles or automobiles) and water in a bucket. Use a soft cloth or sponge to wash your vehicle.
- After washing, rinse your vehicle thoroughly with clean water to remove any residue (residue from the detergent can damage parts of your vehicle).
- Remove the plastic bag and tape.
- Use a soft cloth to dry your vehicle. As you dry, inspect your vehicle for chips and scratches. Do not let the water air dry as this can damage the painted surfaces.

 Carefully ride your vehicle at a slow speed and apply the brakes several times. This helps dry the brakes and restores them to normal operating performance.

APPENDIX

Storage

Whenever your motorcycle will not be in use for a long period, proper storage is essential.

It consists of checking and replacing missing or worn parts; lubricating parts to ensure that they do not corrode and, in general, preparing the motorcycle so that when the time comes to use it again, it will be in top condition.

See your authorized Kawasaki dealer for this service or do the following.

Preparation for Storage

Make sure the area is well ventilated and free from any source of flame.

A DANGER

Exhaust gas contains carbon monoxide, a colorless, odorless poisonous gas. Inhaling carbon monoxide can cause serious brain injury or death. DO NOT run the engine in enclosed areas. Operate only in a well-ventilated area.

${f extstyle L}$ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions, creating the potential for serious burns.

- Turn the ignition key off.
- Do not smoke.
- Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

MARNING

Gasoline is a toxic substance. Dispose of gasoline properly. Contact your local authorities for approved disposal methods.

- Clean the entire vehicle thoroughly.
- Run the engine for about five minutes to warm the oil, shut it off, and drain the engine oil. (see Engine Oil section in the MAINTENANCE AND ADJUSTMENT chapter)

⚠ WARNING

Engine oil is a toxic substance. Dispose of used oil properly. Contact your local authorities for approved disposal methods or possible recycling.

- Put in fresh engine oil.
- Empty the fuel from the fuel tank using a pump or syphon.
- Remove the spark plug and add fogging oil into the combustion chamber. If the spark plug cannot be removed, take the motorcycle to an authorized Kawasaki dealer.
- Set the motorcycle on a stand so that both wheels are raised off the ground. (If this cannot be done, put boards under the front and rear wheels to keep dampness away from the tire rubber.)
- Spray oil on all unpainted metal surfaces to prevent rusting. Avoid getting oil on rubber parts or in the brakes.
- Lubricate the drive chain and all the cables.
- Remove the battery, and store it where it will not be exposed to direct sunlight, moisture, or freezing temperatures. During storage it should be given a slow charge (one ampere or less) about once a month. Keep the battery well charged especially during cold weather.
- Tie plastic bag over the muffler to prevent moisture from entering.
- Put a cover over the motorcycle to keep dust and dirt from collecting on it.

Preparation after Storage

- Remove the plastic bag from the muffler.
- Charge the battery if necessary and install the battery in the motorcycle.
- Fill the fuel tank with fresh fuel.
- Check all the points listed in the Daily Checks section.
- Lubricate the pivots, bolts, and nuts.

Troubleshooting Guide

If any warning indicators go on or blink, see the General Information for proper action. The following trouble shooting guide may also help you in case you experience any of the listed problems. If these checks don't help you to solve the situation, consult an authorised Kawasaki dealer.

If the starter turns but the engine does not start:

- Try turning the ignition key off and on again.
- Check the fuel level in the tank.
- Try refilling with fresh fuel if the vehicle has been stored for a while.
- Check the battery voltage.

If the starter does not turn:

Check the ignition key is switched on.

170 APPENDIX

- Check the engine stop switch.
- Check the transmission is in neutral.
- Check the battery voltage.
- Check the battery terminals are tightly attached.
- Check the fuse.

If the engine stalls:

- Check the clutch is engaged/disengaged correctly.
- Check the side stand is up.
- Check the engine is warmed up enough.
- Check the fuel level in the tank.
- Try refilling with fresh fuel if the vehicle has been stored for a while.
- Check the idling speed is not too low.

Your Warranty/Owner Satisfaction

Welcome to the Kawasaki family!

Congratulations on buying your Kawasaki vehicle. You've chosen a great, highquality product with state-of-the-art features and built to Kawasaki's high standards. Your satisfaction is important to your authorized Kawasaki dealer and to Kawasaki Motors Corp., U.S.A. Here is some important information regarding your vehicle's limited warranty.

Frequently Asked Questions

What is a Limited Warranty?

The most important thing to know about your warranty is that it protects you from manufacturing defects in material or workmanship during the warranty period. You can find the warranty period in the Kawasaki Limited Warranty Certificate your Kawasaki dealer provided to you at the time of sale. The warranty does not cover the cost of regularly-scheduled maintenance. The warranty also does not apply to the normal wear of items such as tires, brake pads, transmission drive belts, chains, sprockets, etc.

What is the Kawasaki Protection Plus?

Much of the warranty coverage offered by the limited warranty can be extended by purchasing the Kawasaki Protection Plus (KPP). See your Kawasaki dealer or go to Kawasaki.com for more information if you don't already have the KPP.

What Am I Responsible For?

You are responsible for maintaining your vehicle according to the maintenance schedule shown in this owner's manual.

172 APPENDIX

You are responsible for notifying your dealer immediately if there is a problem, and you, as the owner, will need to authorize the dealer to inspect the unit.

You will be responsible for paying for routine maintenance, including the first scheduled service. You can have the required servicing done by your Kawasaki dealer (recommended) or an equally-qualified service facility. You can also do your own maintenance work if you have the proper tools, service references, and mechanical skills. However, if a failure is found to be caused by improper servicing, it would not be covered by the limited warranty.

You may purchase a Kawasaki Service Manual and any necessary special tools directly from your Kawasaki dealer.

You will be responsible for paying for repairs needed because of an accident, to replace worn parts such as tires, chains, brakes, and for repairs needed because of a lack of maintenance, misuse or racing.

Whether you do it yourself or take your vehicle to a Kawasaki dealer, be sure to record your service in the Maintenance Record section of this Owner's Manual. Keep all receipts for the service and/or items necessary to perform the maintenance so that in the event of a failure you can document the service history.

What Are The Dealership's Responsibilities?

Your Kawasaki dealer offers a wide range of services, parts, accessories, and information on your product and on Kawasaki.

Each dealer is independently owned and operated and is responsible for the dealership's operations, its repair, warranty, and service work, and its personnel.

Your dealer is responsible for completing the set up and pre-delivery service of your new Kawasaki vehicle. The dealership should also explain its operation, maintenance, and warranty provisions so you understand them at the time of purchase or at any other time you have questions.

The dealership is responsible for inspecting your Kawasaki vehicle if there is a failure, investigating the cause of the problem, and getting any needed authorization from Kawasaki if the repair is one that will be covered by the limited warranty. The dealership will also file all necessary paperwork. The dealership is responsible for correctly completing any necessary repairs, whether they are covered by the limited warranty or not.

174 APPENDIX

How Do I Get Warranty Service?

If there is a problem with your vehicle within the limited warranty period, you will need to schedule a service appointment and provide any maintenance records to an authorized Kawasaki dealer for inspection and diagnosis. You can go to any Kawasaki dealer for warranty repairs. Your Kawasaki dealer will inspect your vehicle and give you the results of the inspection. The dealer will perform the repairs at no cost to you if it is determined that the problem is covered by the warranty.

Kawasaki will work with your dealer to resolve any warranty issues. No authorization for warranty work can be given until your vehicle has been inspected by a Kawasaki dealer.

What if I am not Satisfied With My Warranty Service?

If you aren't satisfied with your dealership's repair work or operations, it is best to discuss the situation with the appropriate dealership manager. If you have already done this, then contact the dealership's owner or general manager to request a review of the issue.

If you are unable to resolve a problem after consulting with the dealership management and need further assistance, contact Kawasaki Motors Corp., U.S.A. at

the address below. Please be certain to provide the model, vehicle identification number (VIN), mileage or hours of use, accessories, dates that events occurred and what action has been taken by both you and your dealer. Include the name and address of the dealership. To assist us in resolving your inquiry, please include copies of related receipts and any other pertinent information including the name of the dealership personnel with whom you have been working. Upon receipt of your correspondence, Kawasaki Motors Corp., U.S.A. will contact the dealership and work with it in resolving your problem.

Want to Contact Kawasaki?

This owner's manual should answer most of your questions about your Kawasaki. Your Kawasaki dealer should either be able to answer any other questions you might have immediately or be able to find the answer for you.


Please send your correspondence to: Consumer Services Kawasaki Motors Corp., U.S.A. P.O. Box 25252 Santa Ana, CA 92799-5252 (949) 460-5688

Environmental Protection

To help preserve the environment, properly discard used batteries, tires, oils and fluids, or other vehicle components that you might dispose of in the future. Consult your authorized Kawasaki dealer or local environmental waste agency for their proper disposal procedure. This also applies to disposal of the entire vehicle at the end of its life.

Location of DFI System Diagnostic Connector

The DFI system diagnostic connector is located back of the right lower fairing.

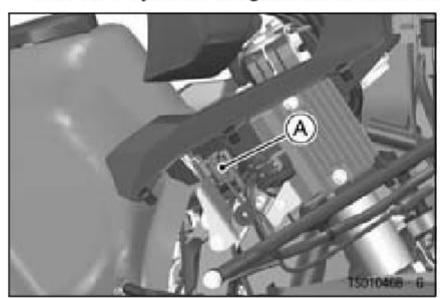

A. DFI System Diagnostic Connector

Vehicle Data Recordings

This vehicle's ECU stores certain data to assist in problem diagnosis, and for other purposes such as periodic technical inspection, regulatory compliance, and research and development.

Although the recorded data varies according to the vehicle model and region, the main information types are as follows:

- Data about the vehicle's status and settings.
- Performance of the engine and electric control equipment on the engine and chassis.
- Information related to the fuel injection system and emissions.

The vehicle's ECU does not record conversations or images.

This data can only be collected when the Kawasaki special diagnostic tool is connected to the vehicle, such as when maintenance checks or other service procedures are performed.

The acquired information will not be disclosed to a third party except in following cases:

- With the consent of the vehicle owner or user
- In case of a legal request by a government agency or judicial body